


Mechanical switching device Series C14

Description **C14-A2Z**

Article number **3935849007**

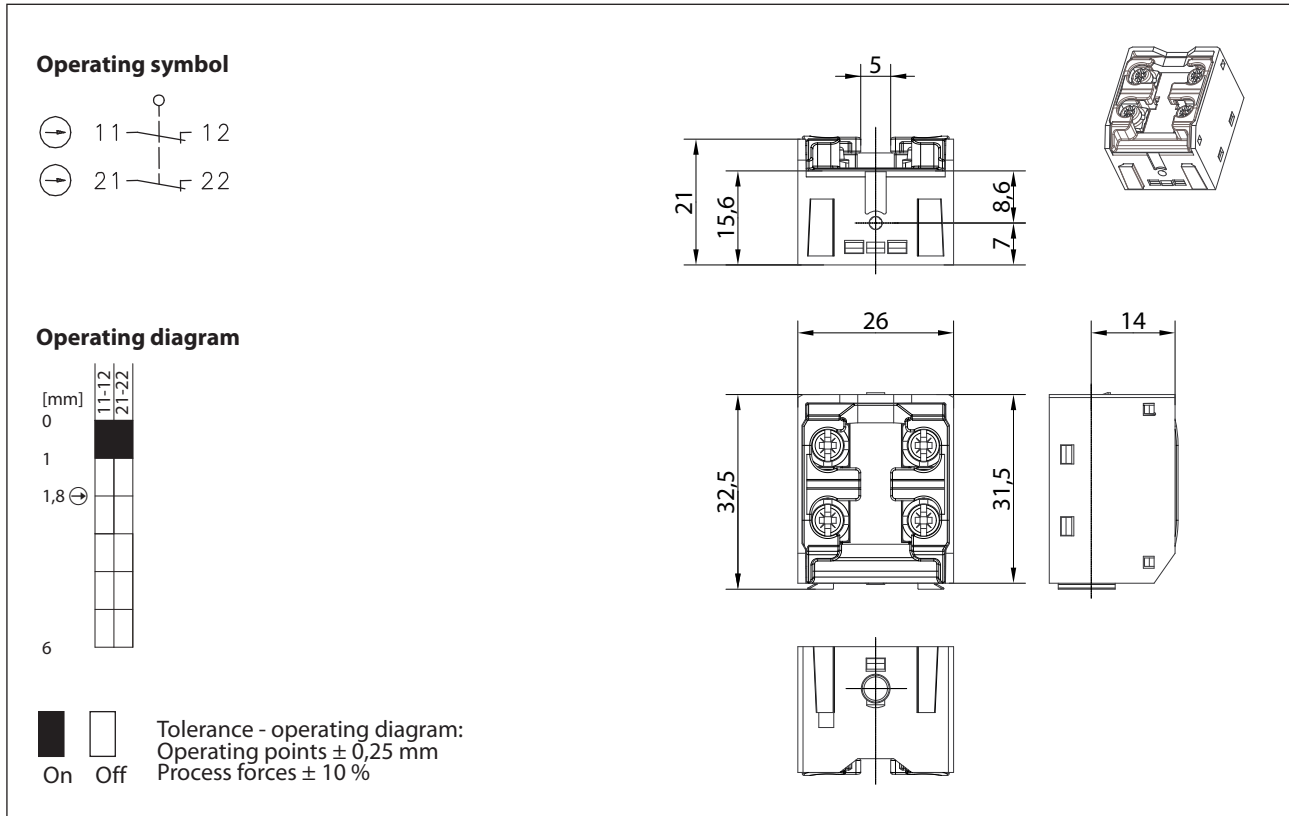

Electrical Data acc. IEC/EN 60947-5-1		
Rated insulation voltage	U_i	400 V
Rated impulse withstand voltage	U_{imp}	4 kV
Rated operational voltage	U_e	240 V AC / 24 V DC
Rated supply frequency AC		50 / 60 Hz
Overvoltage category		II acc. EN 60947-1 annex H table H1
Conventional enclosed thermal current	I_{the}	5 A
Minimum current		1 mA
Reliability		acc. EN 60947-5-4 @ 24 V DC, 1 mA, U_{kd} 2,4 V DC
Utilization category and rated values		AC-15, U_e/I_e 240 V / 1,5 A DC-13, U_e/I_e 24 V / 1,5 A (B300 Tabelle A.1)
Direct opening action	\rightarrow	acc. IEC/EN 60947-5-1, annex K; direct opening force: 25 N
Short-circuit protective device		Fuse 4 A gG
Rated conditional short-circuit current		400 A
Max. contact resistance		25 mOhm (unused)
Electrical life		on request

Mechanical data	
Enclosure	Thermoplastic, glass fibre reinforced (UL 94-V0)
Fastening	Locking connection with switches of the BERNSTEIN AG
Actuator	Plunger (Thermoplastic, glass fibre reinforced (UL 94-V0))
Min. actuating force	F_{bmin} 14 N
Max. force at stroke end	F_{bmax} 30 N
Direct opening force	F_{\ominus} 25 N
Operating temperature	-30 °C ... +75 °C
Storage temperature	-40 °C ... +80 °C
Protection type	IP00 acc. EN 60529
Pollution degree	3
Contact material	silver
Device class	Category E (MC3 + CC2 + SC1) acc. EN 60947-1 annex Q
Contact type	2 N.C. (Form Zb)
Gap between NC-contacts	4 mm (2 x 2 mm)
Operating rate	V 0,06 m/min $\leq V \leq$ 30 m/min
Bounce duration	ms The value depends on the operating rate
Switchover time	ms The value depends on the operating rate
Switching frequency	\leq 100 / min.
Mechanical life	30 x 10 ⁶ operating cycles
Mission time	20 years
Connection	4 screw connections (M3)
Conductor cross-sections	Solid or Litz wire with ferrules 0,34 mm ² - 1,5 mm ² ; AWG 22 - 16
Weight	\approx 0,02 kg
Installation position	operator definable

Actuation
The push bolt actuator is mainly intended to be actuated along its axis.

ID for safety engineering
B10d N.C. 30 x 10 ⁶ cycles (check acc. to DIN EN 60947-5-1)

Standards
VDE 0660 T100, DIN EN 60947-1, IEC 60947-1
VDE 0660 T200, DIN EN 60947-5-1, IEC 60947-5-1
VDE 0660 T211, DIN EN 60947-5-4, IEC 60947-5-4
UL 60947-1, CAN/CSA-22.2 No. 60947-1-13
UL 60947-5-1, CAN/CSA-C22.2 No. 60947-5-1-14
DIN EN ISO 13849-1
DIN EN ISO 13849-2

EU Conformity
acc. to directive 2014/35/EU (Low-Voltage-Directive)

Approvals

cUR_{US} (Mechanical switching device without protection type)
CCC

Notes

Because of the open construction of the device there is no special protection against ingesting of water and touching parts under voltage.