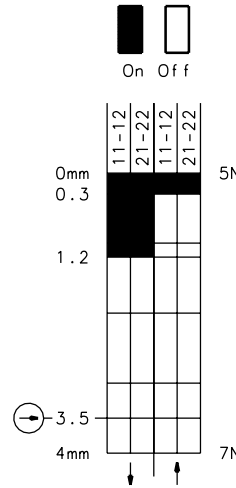
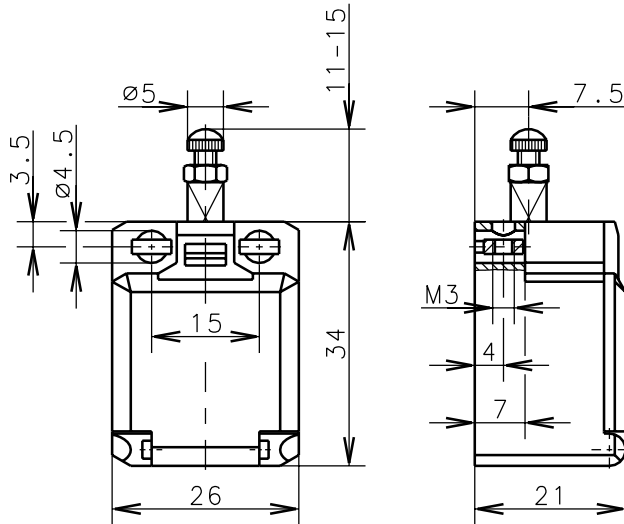



**Bernstein**Bernstein AG
Postfach 1164
D-32437 Porta Westfalica**Technical data sheet**

C2-SA2Z St

600.8854.028

Positive opening
operation according
to DIN EN 60947-5-1
IEC 60947-5-1Switching
diagramSwitching
symbolTolerance: operating point $\pm 0.25\text{mm}$; actuating force $\pm 10\%$ **Mechanical features**

Enclosure: PBT, glass fibre reinforced
 Cover: PC, black
 Actuator: Adjusting screw adjustable; thread M3 with a lock nut

Ambient air temperature: -30°C up to $+80^\circ\text{C}$
 Contact type: 2 NC-contacts (Zb)

Mechanical life: 3×10^6 switch operations
 Switch frequency: max. 100/min
 Mounting: from the top 2xM4, from the front 2xM3
 Connection type: 4 screw connections (M3.5)
 Conductor cross-section: single core $0.5\text{-}1.5\text{mm}^2$ /litz wire with connector sleeve $0.5\text{-}1.5\text{mm}^2$
 Cable entry size: rectangle $8.5 \times 3.5\text{mm}$
 Weight: approx. 0,02kg

Electrical features

Rated insulation voltage: $U_i = 250\text{ V AC}$
 Conventional thermal current: $I_{the} = 10\text{ A}$
 Max. inrush current: according to IEC 947-5-1
 Utilization categorie: AC 15, A300 240V/3A, 120V/6A / DC 13, Q300 250V/0.27A, 125V/0.55A
 Standards: according to EN 60947-1; EN 60947-5-1
 Protection class: IP30 according to EN 60529; DIN VDE 0470 T1
 CSA/UL: 10A 300V AC, A300
 Short circuit protection: Fuse 6A gL/gG, IEC/EN 60947-5-1, appendix K

Approach possibilities

The push bolt actuator is mainly intended to be actuated along it's axis.
 Side actuation will considerably reduce switch life.

Remarks

The moving parts should be oiled periodically.

Schutzvermerk nach DIN 34 beachten
Copyright reserved

23.10.01