


Safety switch

Series SKC- with separate actuator

Description **SKC-A1Z F50 M**

Article number **6116169197**

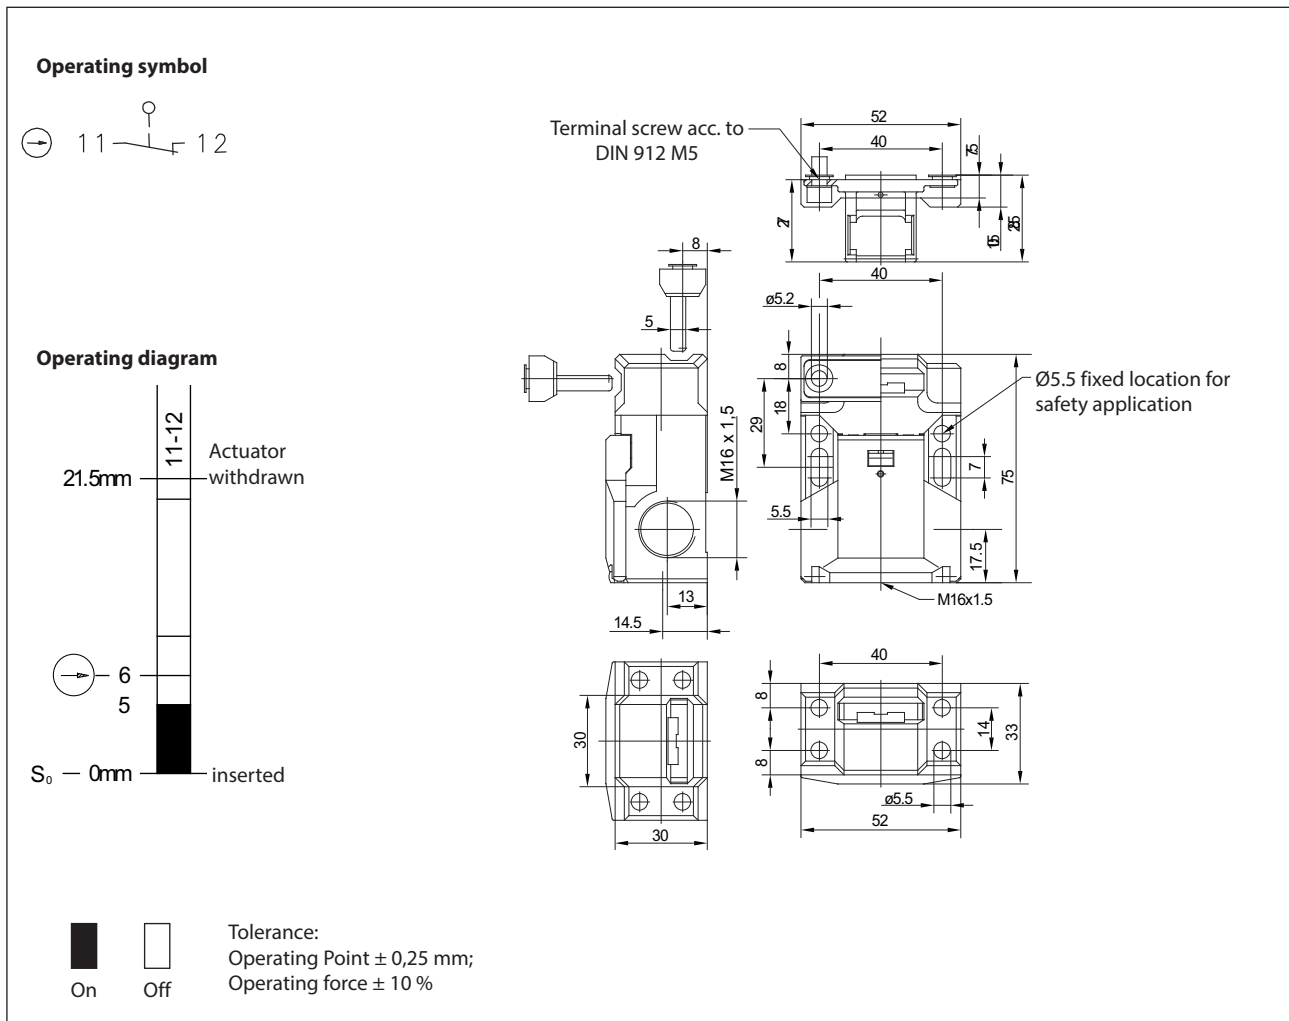


Electrical Data		
Rated insulation voltage	U_i	250 V AC
Conv. thermal current	I_{the}	5 A
Utilization category		AC-15, U_e / I_e 240 V / 1,5 A
Direct opening action	\rightarrow	according to IEC/EN 60947-5-1, Annex K
Short-circuit protective device		Fuse 6 A gG
Protection class		II, totally insulated

Mechanical data	
Enclosure	Thermoplastic, glass fibre reinforced (UL94-V0)
Cover	Thermoplastic, glass fibre reinforced (UL94-V0)
Actuator	Separate actuator (G-stainless steel)
Extraction force	50 N
Ambient air temperature	-30 °C ... +80 °C
Contact type	1 NC (Y)
Mechanical life	1 x 10 ⁵ switch operations
Switching frequency	≤ 30 / min.
Assembly	Safety switch 2 x M5 Actuator 2 x M5
Connection	2 screw connections (M3)
Conductor cross-sections	Solid: 0,5 ... 1,5 mm ² Litz wire with ferrules: 0,5 ... 1,5 mm ²
Cable entrance	3 x M16 x 1,5
Weight	≈ 0,13 kg
Installation position	operator definable
Protection type	IP65 acc. to IEC/EN 60529

ID for safety engineering	
B10d	2 x 10 ⁵ switching cycles

Actuation

Turning the cap (pos A/B) allows 4 different directions of drive.
 Cover (1) has to be opened before turning the cap (2).
 Insert the screwdriver into the gap between housing and cap and turn until the cap snaps off.
 Remove the cap, turn it 180° (4), latch it into the housing and close the cover.



Standards	
	VDE 0660 T100, DIN EN 60947-1, IEC 60947-1
	VDE 0660 T200, DIN EN 60947-5-1, IEC 60947-5-1
	DIN EN ISO 13849-1

EU Conformity	
	acc. to directive 2006/42/EC

Approvals	
	TÜV Rheinland, Type Approved
	CCC
	cCSA _{US} B300 (same polarity)

Notes

The degree of protection (IP code) specified applies solely to a properly closed cover and the use of an equivalent cable gland with adequate cable.
 The switch may not be used as a mechanical stop.
 Radial actuation may reduce the mechanical life.
 The min. radius refers to a pivot at the top of the cap (S0).
 Tapped holes not in use must be closed with blind plugs.

