


Float switch

Series Standard-Float switch



Description **MAN-723 KYS 0500**

Article number **6825130008**

Wiring diagram
(non-actuated state)

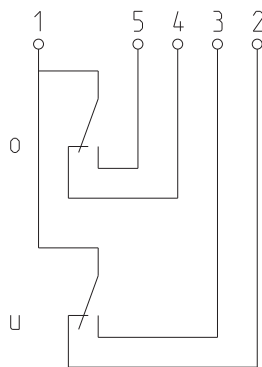

Performance diagram

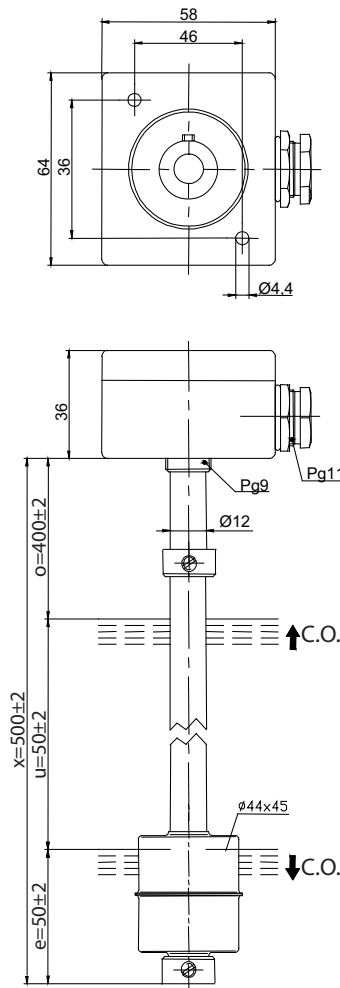

| Electrical data | | |
|---------------------------------|-----------|---|
| Rated voltage | U_r | 250 V |
| max. switching current | | 0,5 A |
| max. switching capacity | | 30 VA |
| Rated insulation voltage | U_i | 300 V AC |
| Rated impulse withstand voltage | U_{imp} | 2,5 kV AC |
| Overvoltage category | | II |
| Switching element | | 1 x C.O., rising level 1 x C.O., falling level |
| Protection class | | I |

| Mechanical data | |
|-------------------------|--|
| Terminal box material | Aluminium coated RAL 7001 |
| Switching tube material | X6CrNiMoTi 17 122 (1.4571) |
| Float material | X6CrNiMoTi 17 122 (1.4571) |
| - density | about 0,7 g/cm ³ ±10 % |
| - depth of immersion | 33 mm ± 2 mm (to a fluid-density of 1 g/cm ³) |
| Adjusting ring material | X6CrNiMoTi 17 122 (1.4571) |
| Gasket | NBR |
| Ambient air temperature | -5 °C to +60 °C |
| Liquid temperature | -5 °C to +60 °C |
| Connection | Terminal strip in the terminal box |
| Protection type | IP 65 acc to IEC529 / EN 60529 |
| Max. pressure | 10 bar |

| Standards |
|------------------|
| DIN EN 60947-5-1 |

| EU Conformity |
|--|
| acc. to directive 2014/35/EU (Low-Voltage-Directive) |

| General details |
|---|
| The measures of the switching points refer to a fluid-density of 1 g/cm ³ . The tolerance of the switching points is ±2 mm Pay attention to the contact protection, when switching inductive or capacitive loads. Maximum data must not be exceeded! |

| Inductive loads |
|---|
| <div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>Direct current</p> <p>Suppression of voltage peaks with a free-wheeling diode</p> </div> <div style="text-align: center;"> <p>Alternating voltage</p> <p>Suppression of voltage peaks with a VDR</p> </div> <div style="text-align: center;"> <p>Suppression of voltage peaks with an RC element</p> </div> </div> |

| Capacitive loads and lamp loads |
|---|
| <p>Contact protection with resistors for limiting current</p> |