


Safety switch

Series SLK – with separate actuator


Description **SLK-M-UC-55-R0-A0-L0-0**

Article number **6018119047**


Position monitoring of guard locking
(not wired)




Termination electromagnet with contact position
E1, E2 without current




E1, E2 with current



Operating diagram

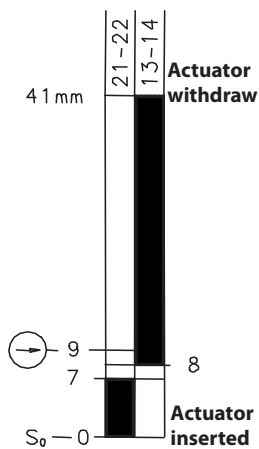

The actuator is not included in the scope of delivery. It can only be purchased in conjunction with the safety switch.

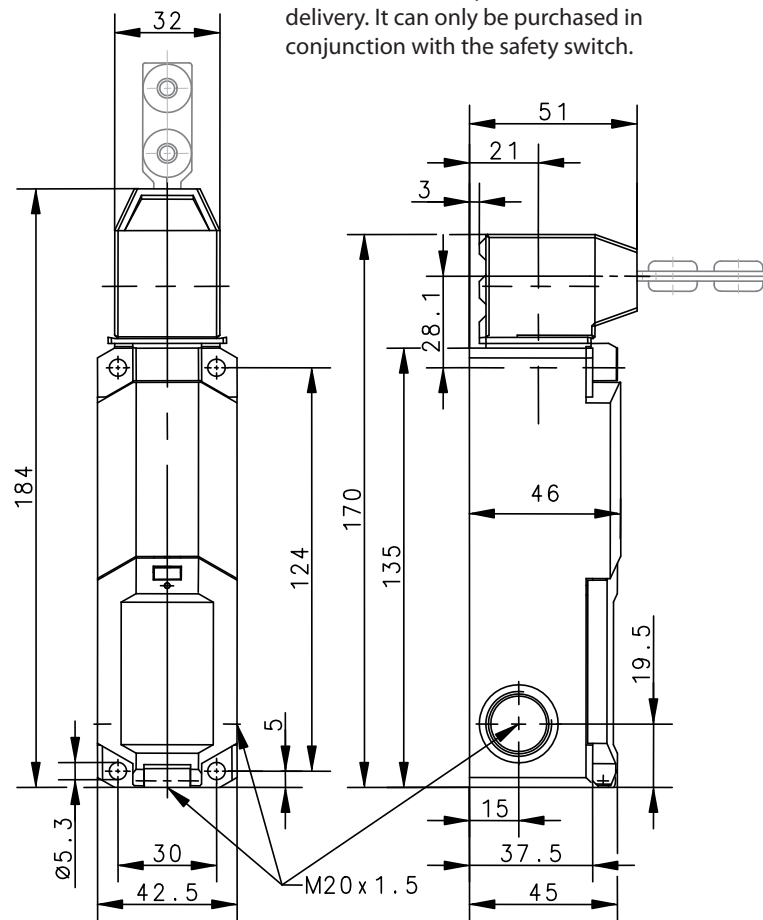

| Electrical data | |
|---------------------------------|--|
| Protection class | II, totally insulated |
| Contact elements | |
| Rated insulation voltage | U_i 250 V |
| Rated impulse withstand voltage | U_{imp} 2,5 kV |
| Conv. thermal current | I_{the} 5 A |
| Utilization category | AC-15, U_e / I_e 230 V / 2,5 A |
| Direct opening action | ⊕ according to IEC/EN 60947-5-1, Annex K |
| Short-circuit protective device | 4 A gG |
| Electro magnets | |
| Duty cycle | 100 % ED (at E1; E2) |
| Temperature class | F (155 °C) |
| Inrush power consumption | 12 VA (0,2 s) |
| Permanent power consumption | 4,4 VA |
| Switch operations permanent | 600 / h |
| Operating voltage | 24 V AC / DC |

| Mechanical data | |
|--------------------------|--|
| Enclosure | Thermoplastic, glass fibre reinforced (UL 94-V0) |
| Cover | Thermoplastic, glass fibre reinforced (UL 94-V0) |
| Actuating head | Thermoplastic, glass fibre reinforced / Zn-GD |
| Actuator | Separate actuator (Steel / PA) |
| Minimum actuating radius | R_{min} see separate actuators data sheet |
| Velocity for actuating | V_{max} 0,5 m/s |
| Extraction force | ≥ 27 N |
| Interlocking principle | Magnetic force |
| Unlocking | Spring force |
| Hold on force | F_{Zh} ≤ 1500 N acc. to GS-ET-19 |
| Ambient air temperature | -25 °C ... +70 °C |
| Contact type | 2 NC, 2 NO |
| Switching principle | 4 slow make and break contact elements |
| Mechanical life | 1 x 10 ⁶ switching cycles (at max. 600 switch operations / h) |
| Assembly | 4 x M5 |
| Connection | Spring-clamp connection |
| Conductor cross-sections | 0,5 ... 1,5 mm ² flexible |
| Cable entrance | 3 x M20 x 1,5 |
| Weight | ≈ 0,34 kg |
| Installation position | operator definable |
| Protection type | IP67 acc. to IEC/EN 60529 |

| ID for safety engineering | |
|----------------------------------|--------------------------------------|
| B10d | 2 x 10 ⁶ switching cycles |

| Actuation | |
|---|--|
| 4 different actuating directions achievable by rotating the actuating head. Changing between horizontal and vertical actuating direction by setting the actuating head in the requested direction. | |

| Standards | |
|-----------|--|
| | VDE 0660 T100, DIN EN 60947-1, IEC 60947-1 |
| | VDE 0660 T200, DIN EN 60947-5-1, IEC 60947-5-1 |
| | GS-ET-19 |
| | DIN EN ISO 13849-1 |

| EU Conformity | |
|---------------|--|
| | acc. to directive 2006/42/EC (Safety-of-Machinery-Directive) |

| Approvals | |
|-----------|---|
| | DGUV |
| | cCSA _{US} B300 (same polarity) |
| | CCC |

| Notes | |
|--|--|
| <p>The degree of protection (IP code) specified applies solely to a property closed cover and the use of an equivalent cable gland with adequate cable.</p> <p>The switch may not be used as a mechanical stop.</p> <p>In case that power is removed from the solenoid the safety switch will be no longer in a locked position! Operator can open the guard! Attention has to be given to the risks of the machine in this situation!</p> | |