


**Foot-switch**  
Series MF1

Description **MF1-500-0-0**

Article number **6060100001**

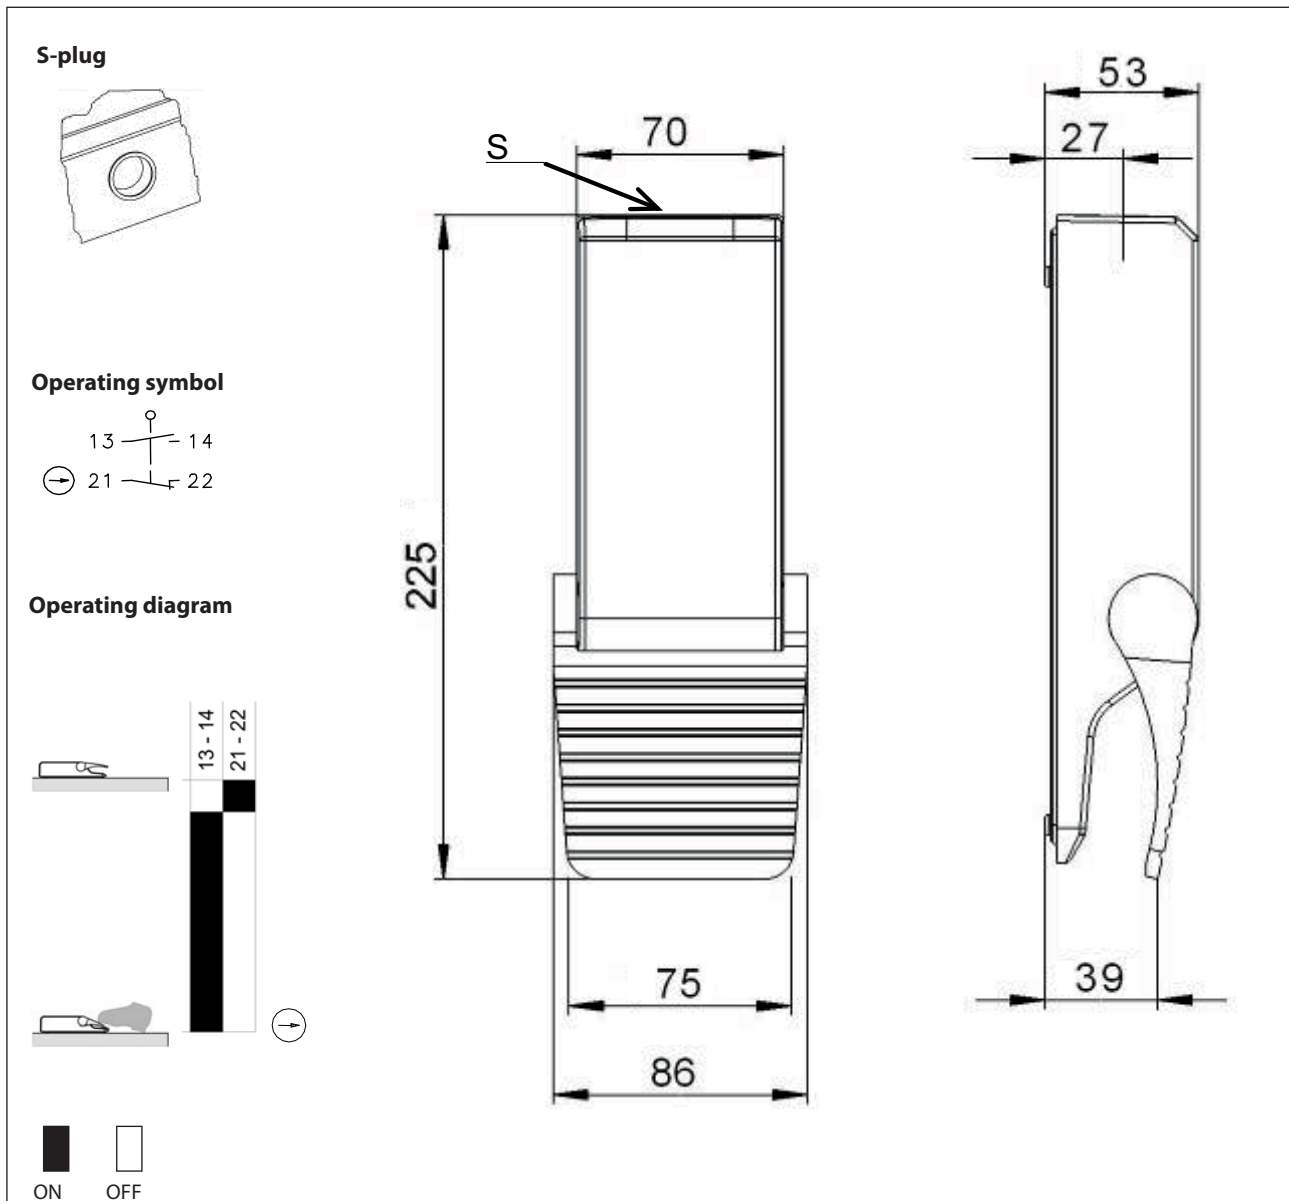

**Electrical Data**

Rated operational voltage	$U_e$	$\leq 30$ V DC
Rated operational current	$I_e$	$\leq 0,5$ A
Direct opening action	$\ominus$	acc. to IEC/EN 60947-5-1, Annex K
Protection class		I

<b>Mechanical data</b>	
Enclosure	AL, die-cast (powder-coated), Pantone Cool Gray 2c
Cover	AL, die-cast (powder-coated), Pantone Cool Gray 2c
Actuator	1 pedal (thermoplastic) RAL 7036 (platinum grey)
Ambient air temperature @ $t = \infty$	$-10\text{ °C} \leq T \leq +80\text{ °C}$
$t \leq 2\text{ h}$ (cleaning)	$-10\text{ °C} \leq T \leq +95\text{ °C}$
Normal use condition	temperature $+10\text{ °C} \leq T \leq +40\text{ °C}$ air humidity 5 % ... 95 % - no condensation atmospheric pressure 700 hPa ... 1060 hPa
Storage and transport condition	temperature $-20\text{ °C} \leq T \leq +80\text{ °C}$ air humidity 5 % ... 95 % - no condensation atmospheric pressure 700 hPa ... 1060 hPa
Contact type	1 changeover (Zb)
Operating force	15 N $\pm$ 10 %
Mechanical life	> 1 x 10 <sup>6</sup> operating cycles
Switching frequency	50 switching cycles / min
Connection	screw connections
Conductor cross-sections	Solid: 0,5 – 1,5 mm <sup>2</sup> Litz wire with or without ferrules: 0,5 – 1,5 mm <sup>2</sup>
Protection ground	2 x M4
Cable entrance	1 x M20 x 1,5
Weight	≈ 0,8kg
Protection type	IPX8 acc. to IEC/EN 60529 (0,15 bar / 1 h)

<b>ID for safety engineering</b>	
B10d	2 x 10 <sup>6</sup> cycles

<b>Standards</b>	
	VDE 0660 T100, DIN EN 60947-1, IEC 60947-1
	VDE 0660 T200, DIN EN 60947-5-1, IEC 60947-5-1
	IEC 60601-1
	UL 60601-1
	DIN EN ISO 13849-1

<b>EU Conformity</b>	
	acc. to directive 2006/42/EC

<b>Approvals</b>	
Only if approved components are used	

<b>Test</b>	
	AP

<b>Notes</b>	
The degree of protection specified (IP code) applies only to a properly closed cover and the use of an equivalent cable gland with adequate cable. Selection of components and installation of the grounding equipment conductor must fulfil IEC 60601-1 / UL 60601-1 requirements.	