


Plastic bodied limit switch

Series ENK

Description ENK-U1Z AHSGU

Article number 6181135046

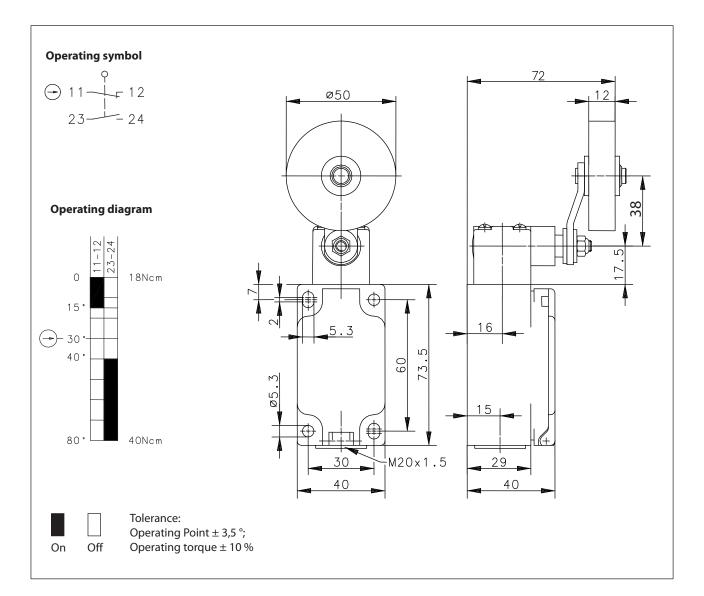

Electrical Data		
Rated insulation voltage	Ui	400 V AC
Conv. thermal current	$I_{\rm the}$	10 A
Rated operational voltage	U_{e}	240 V
Utilization category		AC-15, U _e /I _e 240 V / 3 A
Positive opening operation	\ominus	acc. to IEC/EN 60947-5-1, annex K
Short-circuit protective device		Fuse 10 A gG
Protection class		II, totally insulated

BERNSTEIN AG . Hans-Bernstein-Straße 1 . 32457 Porta Westfalica . www.bernstein.eu

Technical modifications and errors excepted.

The technical datasheet corresponds to the technical state as of 2017-09-18 and will not be removed in case of changes.

Technical Data



Mechanical data		
Enclosure	Thermoplastic, glass fibre reinforced (UL 94-V0)	
Cover	Thermoplastic, glass fibre reinforced (UL 94-V0)	
Actuator	Turret head (Zn-die cast), lever (st), roller (rubber)	
Ambient air temperature	-30 °C +80 °C	
Contact type	1 NC, 1NO (Zb)	
Mechanical life	10 x 10 ⁶ operating cycles	
Switching frequency	≤ 100 / min.	
Assembly	4 x M5	
Connection	4 screw connections (M3,5)	
Conductor cross-sections	Solid: 0,5 1,5 mm ² or Litz wire with ferrules: 0,5 1,5 mm ²	
Cable entrance	1 x M20 x 1,5	
Weight	≈ 0,26 kg	
Installation position	operator definable	
Protection type	IP65 acc. to IEC/EN 60529	

Actuation

The actuating device is preferably started from 2 sides.

By loosening the 4 screws the actuation assembly can be rotated in 90 degree increments such that 8 actuation directions are possible.

The actuation assembly is to be again fastened to the housing using the 4 screws.

ID for safety engineering	
B10d	20 x 10 ⁶ cycles

andards
VDE 0660 T100, DIN EN 60947-1, IEC 60947-1
VDE 0660 T200, DIN EN 60947-5-1, IEC 60947-5-1
DIN EN ISO 13849-1

EU Conformity

acc. to directive 2014/35/EU (Low-Voltage-Directive)

Approvals	
CSA _{US}	A300 (same polarity)
UL	

Notes

The degree of protection (IP code) specified applies solely to a property closed cover and the use of an equivalent cable gland with adequate cable.

BERNSTEIN AG . Hans-Bernstein-Straße 1 . 32457 Porta Westfalica . www.bernstein.eu