## **Technical Data** Magnetic proximity sensor




Item number

6370281145

## Series E22

## Type designation MEK-E22PS/HP-KL0,3S

Wiring diagram

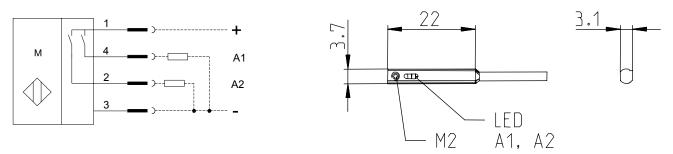

## Identifying characteristics in accordance with EN 60947-5-2

Electrical data			
Magnetic sensitivity			± 1,5 mT ± 13,5 mT
Switching element function			DC, N.O., open collector, 2 switching points programmable
Repeat accuracy		R	$\leq$ 0,1 mT (constant U <sub>B</sub> and ambient air temperature)
Differential travel (hysteresis)		Н	1 mT ≤ H ≤ 1,35 mT
Operational voltage range		UB	10 - 30 VDC
Rated insulation voltage		Ui	75 VDC
Voltage drop		Ud	< 2 V @ 50 mA
Utilization category			DC-12
Rated operational current		le	≤ 50 mA (1 output activated)
			≤ 25 mA per output (both outputs activated)
Leakage current			< 25 µA
No-load supply current		lo	< 10 mA (not activated)
Rated conditional short–circuit current			100 A
Switching element			Hall
Short–circuit protection		pulsed	
Mounting			from side into a C-Groove
False polarity protection			yes
Electromagnetic compatibility (EMC)			
Electromagnetic field test			IEC 61000-4-3
Electrostatic discharge test			IEC 61000-4-2
Electrical fast transient immunity test (Burst)			IEC 61000-4-4
Conducted disturbances, inducted by high frequency			IEC 61000-4-6
electromagnetic fields			
Radiated disturbance field strength		EN 55011	
Mechanical Data			
Enclosure			GV-5H (PA), black
Ambient air temperature		-20 °C +80 °C (cable fixed mounted)	
Type of protection			IP 67 acc. to IEC 529, EN 60529
			(only in fully locked position with it's plugs)
Function indication	Output A1		LED orange, output indication / output activated
	Output A2		LED yellow, output indication / output activated
Termination type			Cable 0,3 m ± 5 %, PUR-Outer jacket, black; with plug connector M8
Attachment		1 x setscrew M2 x 3, DIN 913	
			1 x allen wrench
			1 x programming tool
EU Conformity			CE

This document will not become the contractual basis; the details included herein do not constitute any descriptions of expected conditions, so that warranties/claims for defects on account of possible variations of the actual from the here described condition are excluded. Subject to modifications and amendments.

Date of issue: 24.02.2009 / Page 1 of 1 Document: 6370281145\_en.doc / Last update: 2 / 0089-09