


Capacitive Proximity Switch Series M12

Description **KCB-M12NÖ/002-KLSM8**

Article number **6507103004**

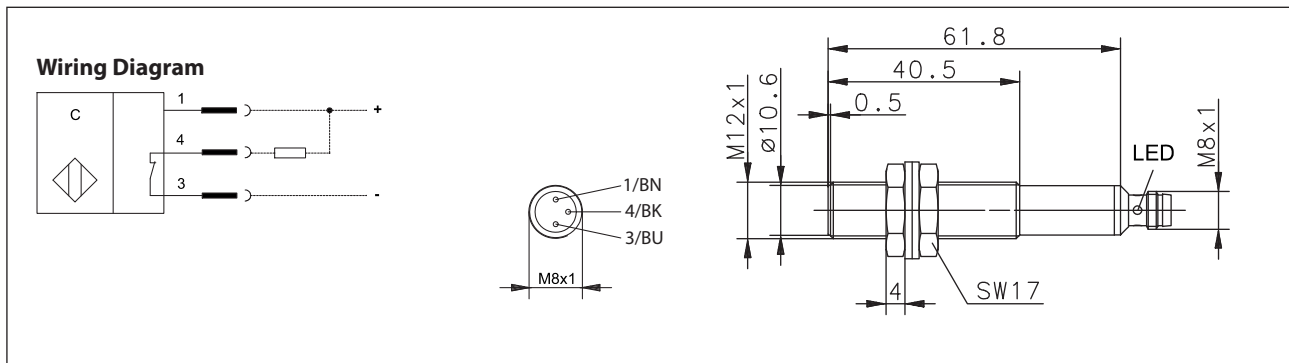

Identifying characteristics in accordance with EN 60947-5-2

Electrical data	
Rated operating distance	S_n 2 mm
Mounting	flush
Standard target	12 x 12 x 1 mm; material: steel; connected to earth
Effective operating distance	S_r 1,8-2,2 mm; S_r adjustable with potentiometer (POT); turn right \triangleq high sensitivity, turn left \triangleq low sensitivity
Assured operating distance	S_a $0 \leq S_a \leq 0,8 \cdot S_r$
Switching element function	N.C.
Repeat accuracy	R $\leq 0,1 \cdot S_r$
Differential travel (hysteresis)	H $\leq 0,2 \cdot S_r$
Frequency of operating cycles	f ≈ 25 Hz
Rate doperational voltage	U_e 12 V - 24 V DC
Operational voltage range	U_b 10 V - 36 V DC
Rated insulation voltage	U_i 75 V DC
Rated impulse withstand voltage	U_{imp} 500 V
Voltage drop	U_d $\leq 1,5$ V DC
Utilization category	DC-13
Rated operational current	I_e 200 mA DC
Minimum operational current	I_m ≥ 1 mA DC
Off-state current	I_r $\leq 0,5$ mA DC
No-load supply current	I_o ≤ 15 mA DC
Switching element	permanent overload and s.c.p.
Short-circuit protection	pulsed
False polarity protection	with permutation of +, -, output no damage occurs
Time delay before availability	t_v ≤ 50 ms

Electromagnetic compatibility (EMC)		
Electromagnetic field test	IEC 61000-4-3	3 V/m, 80...1000 MHz
Electrostatic discharge test	IEC 61000-4-2	4 kV CD / 8 kV AD
Electrical fast transient immunity test (Burst)	IEC 61000-4-4	1kV coupling clamp
Impulse voltage withstand ability (Surge)	IEC 61000-4-5	500 V, 1,2/50 μ s @ Ri = 42 Ω
Radiated disturbance field strength	EN 55011	\leq 40 dB (μ V/m)

Mechanical Data	
Enclosure	Brass, nickel plated
Front cap	PTFE
Ambient air temperature	-25 °C ... +70 °C
Type of protection	IP65 (with plug-in-connector) IP67 (with screwed plug-in-connector)
Pollution degree	3 (Pollution of the optic can cause impairments of the operating distances.)
Indication	Output ON = LED yellow
Termination type	M8 x 1, brass, nickel plated
For attachment	Hexagon nut, brass, nickel plated (with toothed washers A2)

EU Conformity
acc. to directive 2014/30/EU (EMC-Directive)