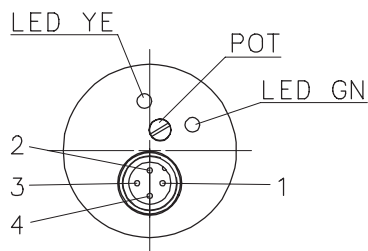
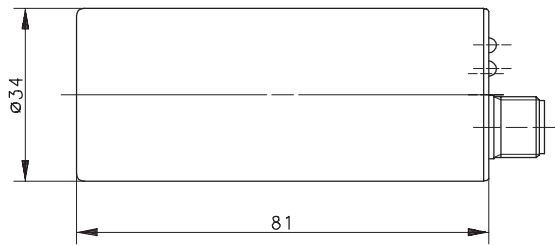



**BERNSTEIN**Unternehmensbereich
Sensortechnik**Technisches Datenblatt****Kapazitiver Grenztaster**Type: **KCN-R34PS/030-KLPS12**Art.-Nr.: **660.7915.012**

04.05.05/0372-05

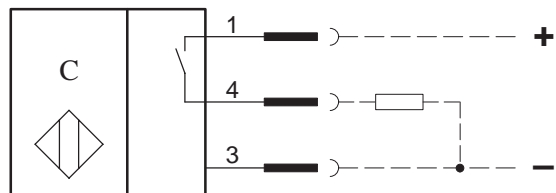
**Schaltungsart****Plus-Schließer, DC**
Bei Bedämpfung schaltet PNP
Transistor Ausgang an Plus**Allgemeine Kenndaten**

Gehäuse	PBT, Farbe: rot
Schutzart	IP 67 ¹⁾
Umgebungstemperatur	-25 °C bis +70 °C
Anschlußart	M12 x 1 – Steckverbinder
Gegen beliebiges Verpolen der Anschlußleitungen geschützt	
Transientenfestigkeit	500 V; 1,2/50 µs bei Ri = 42 Ω
Ausgang dauerkurzschluß- und Überlastfest	
Funktionsanzeige	2 LED ²⁾
Schaltabstand einstellbar	ja

Sonderheiten / Anmerkungen

- 1) nur im verschraubten Zustand mit den dazugehörigen Gegenstücken
- 2) Betriebsspannung : LED = grün
Ausgang : LED = gelb

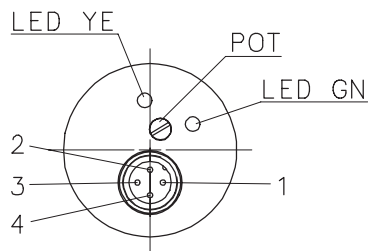
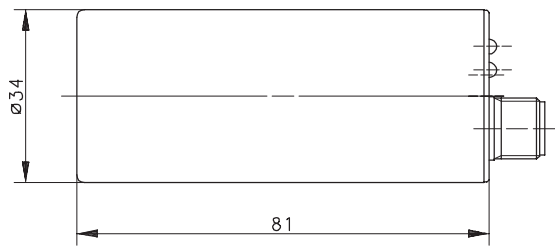
Anschlußschema:

**Spezielle Kenndaten****Bemerkungen**

Bemessungsschaltabstand	s _n	30 mm	s _r = s _n ±10 %
Erfassungsbereich	s _d	6 ... 30 mm	
Einbauart		nicht bündig	
Nennspannung	U _e	12 – 48 V DC	
Betriebsspannung	U _B	10 – 60 V DC	einschließlich Restwelligkeit
Schaltstrom	I _e	≤ 400 mA	
Reststrom	I _R	≤ 0,5 mA	
Stromaufnahme ohne Last	I _o	≤ 20 mA	
Spannungsabfall	U _d	< 3 V	
Schalthysterese	H	≤ 20 %	bezogen auf s _r
Reproduzierbarkeit	R	≤ 10 %	
Bereitschaftsverzug	t _v	< 50 ms	
Schaltfrequenz	f	≈ 25 Hz	

**BERNSTEIN**Division
Sensortechnik**Data Sheet****Capacitive Proximity Sensor**Type: **KCB-R34PS/030-KLPS12**Art.-No.: **660.7915.012**


04.05.05/0372-05

**General Features**

housing	PBT, red
protection	IP 67; NEMA 4 ¹⁾
operating temperature	-25°C to 70°C
termination type	plug socket (M12x1)
protection against reverse supply polarity	
max. transient voltage rate	500 V; 1,2/50 µs at Ri = 42 Ω
permanent overload and s.c.p.	
indication	2 LED ²⁾
sensing distance adjustable	

Options / Comments

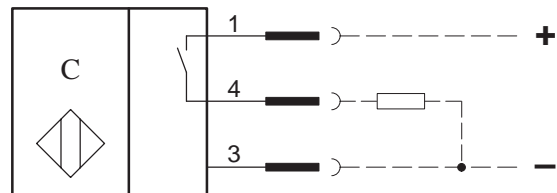
- 1) only in fully locked position with it's plugs
 2) Indicator LED:
 operating voltage: LED = green
 output: LED = yellow

Electrical Output

Make (normally open)

PNP

The sensor switches the load to the positive terminal.

Wiring Diagram:**Characteristics****Remarks**

rated operating distance	s _n	30 mm	s _r = s _n ±10 %
sensing range	s _d	6 ... 30 mm	
mounting		non flush	
rated operational voltage	U _e	12 – 48 V DC	
operational voltage range	U _B	10 – 60 V DC	incl. ripple frequency
rated operational current	I _e	≤ 400 mA	
off-state current	I _R	≤ 0,5 mA	
non-load supply current	I _o	≤ 20 mA	
voltage drop	U _d	< 3 V	
hysteresis	H	≤ 20 %	relative to s _r
repeat accuracy	R	≤ 10 %	
time delay before availability	t _v	< 50 ms	
frequency of operating cycles	f	≈ 25 Hz	