


Technical Data

Float Switch


Standard float switches

Description **MAM-713 KSS 0189**


Article number **6815205004**

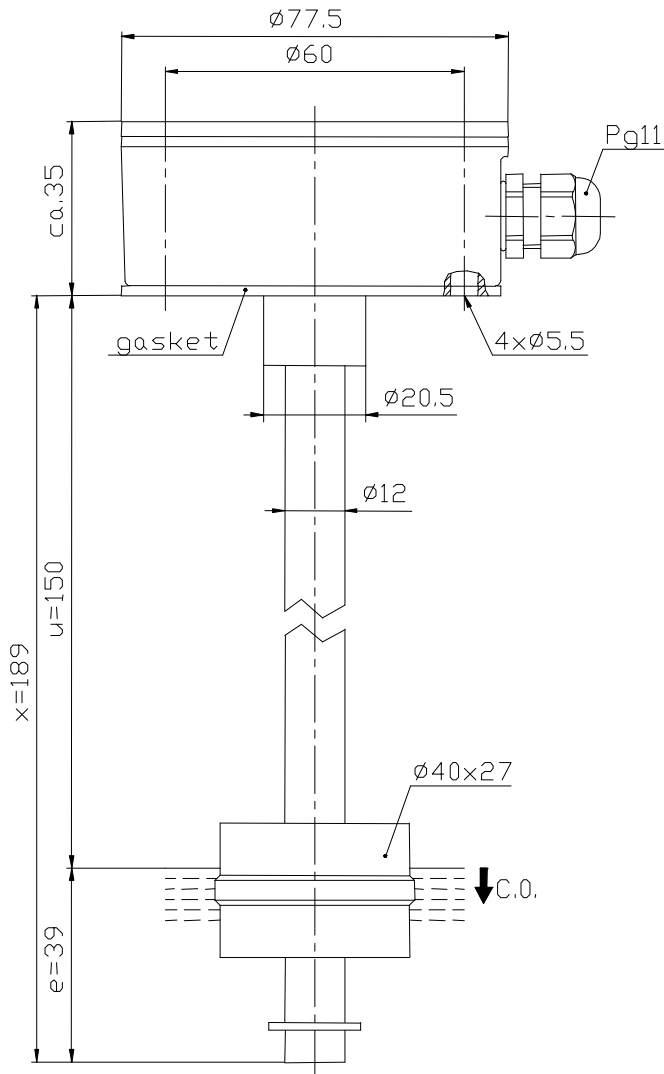

Performance diagram (maximum data)

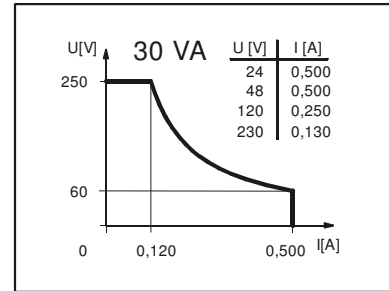

Wiring diagram (matching to the drawing)

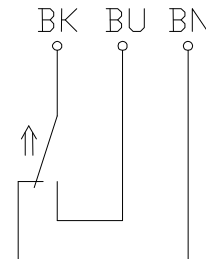

Subject to change without notice.

Date of issue : 17.05.2006 / Page 1 of 2
Document : 6815205004_en.doc / Last update : 1

Standard float switches

Description **MAM-713 KSS 0189** Article number **6815205004**

Electrical data

| | | |
|--------------------|-------------------------|---|
| Reed contact | max. switching voltage | 250 V |
| | max. switching current | 0,5 A |
| | max. switching capacity | 30 VA |
| | mechanical life | 10 ⁷ to 10 ⁹ switches depending on the load |
| Switching element | | 1 change over contact, falling level |
| Direction category | | AC-22A and DC-22A acc to DIN VDE 0660 T107 |
| Standard | | acc to DIN VDE 0660 T200 |

Mechanical data

| | |
|-------------------------|---|
| Terminal box material | GK-AISI12 (3.2581.02) |
| Switching tube material | CuZn37 (2.0321) |
| Float material | POM |
| -density | about 0,7 g/cm ³ ±10% |
| -depth of immersion | 18 mm ±2 mm (to a fluid-density of 1 g/cm ³) |
| Grip screw material | CuSn8 |
| Gasket material | NBR |
| Ambient air temperature | -5°C to +60°C |
| Liquid temperature | -5°C to +60°C |
| Connection | connection block inside the terminal box |
| Protection type | IP 65 acc to DIN VDE 0470 T1 |
| Max. pressure | 10 bar |

General details

Repeatability of switching points is ±0,05mm based on the same geometrical conditions as of a switch device.

The measures of the switching points refer to a fluid-density of 1 g/cm³.

The tolerance of the switching points is ±2mm

Pay attention to the contact protection, when switching inductive loads. Maximum data must not be exceeded!