


Technical Data

Float Switch


Standard float switches

Description **MAD-713 KTOS 0980**


Article number **6815366015**

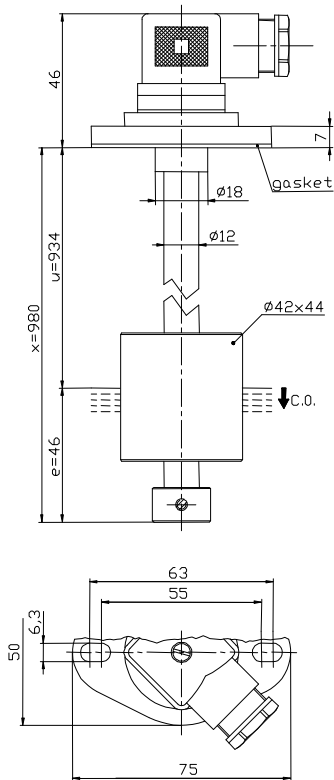

Performance diagram
(maximum data)

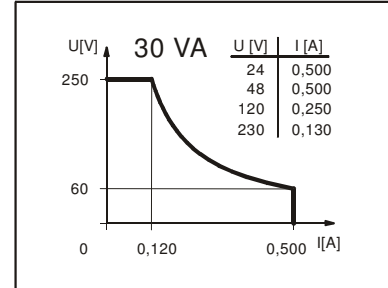

Wiring diagram
(matching to the drawing)



Electrical data

Reed contact	max. switching voltage	250 V
	max. switching current	0,5 A
	max. switching capacity	30 VA
	mechanical life	10 ⁷ to 10 ⁹ switches depending on the load
Switching element		1 change over contact, falling level
Direction category		AC-22A and DC-22A acc to DIN VDE 0660 T107
Standard		acc to DIN VDE 0660 T200

Mechanical data

Flange material	PA 6.6
Switching tube material	PVC
Float material	PVC
-density	about 0,6 g/cm ³ ±10%
-depth of immersion	25 mm ±2 mm (to a fluid-density of 1 g/cm ³)
Adjusting ring material	PVC
Gasket material	NBR
Ambient air temperature	-5°C to +60°C
Liquid temperature	-5°C to +60°C
Connection	plug-in connection acc. to DIN 43650
Protection type	IP 65 acc to DIN VDE 0470 T1
	<u>only with female socket</u>
Max. pressure	5 bar

General details

Repeatability of switching points is ±0,05mm based on the same geometrical conditions as of a switch device.
 The measures of the switching points refer to a fluid-density of 1 g/cm³.
 The tolerance of the switching points is ±2mm
 Pay attention to the contact protection, when switching inductive loads. Maximum data must not be exceeded!

Subject to change without notice.