


Float switch

Series Standard-Float switch



Description **MAT-711 LSS 0500**

Article number **6816165017**

Wiring diagram (non-actuated state)



Performance diagram

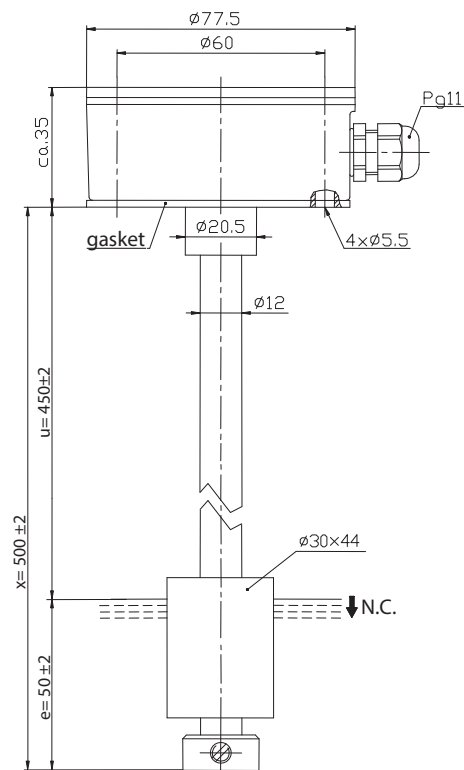

Electrical data		
Rated voltage	U_r	250 V
max. switching current		1,0 A
max. switching capacity		60 VA
min. switching capacity		3 VA
Rated insulation voltage	U_i	300 V AC
Rated impulse withstand voltage	U_{imp}	2,5 kV AC
Overvoltage category		II
Switching element		1 N.C., falling level
Protection class		I

Mechanical data	
Terminal box material	Aluminium coated RAL 3016
Switching tube material	X6CrNiMoTi17-12-2 (1.4571)
Float material	PP
- density	about 0,7 g/cm ³ ±10 %
- depth of immersion	30 mm ± 2 mm (to a fluid-density of 1 g/cm ³)
Adjusting ring material	X6CrNiMoTi17-12-2 (1.4571)
Gasket material	NBR
Ambient air temperature	-5 °C to +60 °C
Liquid temperature	-5 °C to +60 °C
Connection	Connecting block inside the terminal box
Protection type	IP 65 acc to IEC529 / EN 60529
Max. pressure	5 bar

Standards
DIN EN 60947-5-1

EU Conformity
acc. to directive 2014/35/EU

General details
The measures of the switching points refer to a fluid-density of 1 g/cm ³ . The tolerance of the switching points is ±2 mm Pay attention to the contact protection, when switching inductive or capacitive loads. Maximum data must not be exceeded!

Inductive loads			
<p>Direct current</p> <p>Suppression of voltage peaks with a free-wheeling diode</p>	<p>Alternating voltage</p> <p>Suppression of voltage peaks with a VDR</p>	<p>Suppression of voltage peaks with an RC element</p>	

Capacitive loads and lamp loads		
Contact protection with resistors for limiting current		