


**Performance diagram**  
(maximum data)

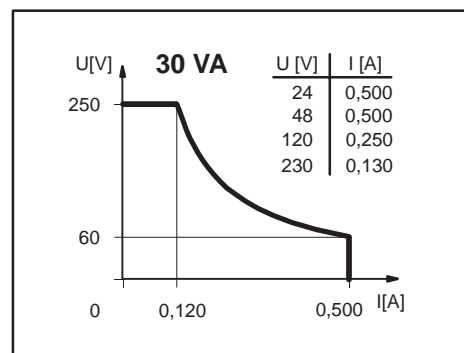

**Electrical Data** ( maximum data ) :

- contact
- max. voltage : 250 V
  - max. switching current : 0.5 A
  - max. switching capacity : 30 VA
- switching function : 2 change over contacts, falling level
- direction category : AC-21A and DC-21A  
acc. to DIN VDE 0660 T107  
( IEC 947-3-1 / EN 60947-3-1 )
- standard : acc. to DIN VDE 0660 T200  
( IEC 947-5-1 / EN 60947-5-1 )

**Pay attention to the contact protection, when switching inductive loads.**  
**Maximum data must not be exceeded !**

**Technical Data :**

- mode of connection : terminal block inside the head; Pg11 screw joint
- protection type : IP 65 acc. to DIN VDE 0470 T1  
( IEC 529 / EN 60529 )
- temperature range : form -5°C to +60°C
- max. pressure : 10 bar
- mech. lifetime : 10<sup>7</sup> to 10<sup>9</sup> switches depending on the load


Reproducibility is ±0.05 mm under same geometrical conditions according to one switch device.

**ATTENTION :**

The measures of the switching points are related to a fluid-tight of 1 g/cm<sup>3</sup>  
The tolerances of the switching points are ±2 mm

**Wiring diagram**

(matching ti the drawing)



**Mechanical Data :**

- terminal box material : GD-AISi12(3.2581.05)
- switching tube material : X 6 CrNiMoTi 17 12 2 (1.4571)
- float material : X 6 CrNiMoTi 17 12 2 (1.4571)
- tightness : 0.65 g/cm<sup>3</sup>
  - depth of immersion : 32 mm ±2 mm ( to a fluid-tight of 1 g/cm<sup>3</sup> )
- adjusting ring material : X 6 CrNiMoTi 17 12 2 (1.4571)
- gasket material : NBR