



Customer ID-Nr. : 39161-4323

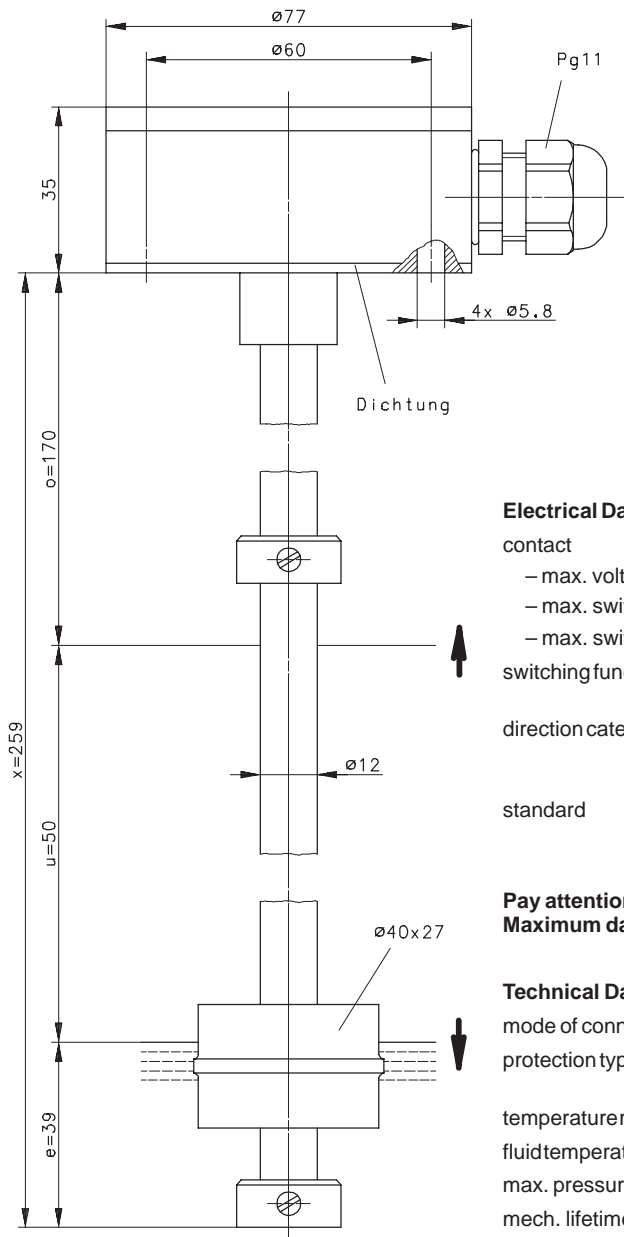

**Performance diagram**  
(maximum data)

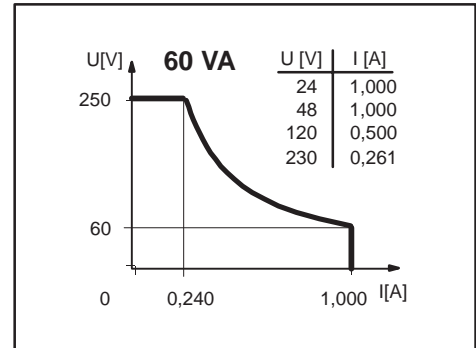

**Electrical Data ( maximum data ) :**

- contact
  - max. voltage : 250 V
  - max. switching current : 1.0 A
  - max. switching capacity : 60 VA
- switching function : o = normally-close contact, rising level  
u = normally-open contact, falling level
- direction category : AC-21A and DC-21A  
acc. to DIN VDE 0660 T107  
( IEC 947-3-1 / EN 60947-3-1 )
- standard : acc. to DIN VDE 0660 T200  
( IEC 947-5-1 / EN 60947-5-1 )

**Pay attention to the contact protection, when switching inductive loads. Maximum data must not be exceeded !**

**Technical Data :**

- mode of connection : connecting block inside the terminal box
- protection type : IP 65 acc. to DIN VDE 0470 T1  
( IEC 529 / EN 60529 )
- temperature range : form -5°C to +60°C
- fluid temperature : form -5°C to +60°C
- max. pressure : 5 bar
- mech. lifetime : 10<sup>7</sup> to 10<sup>9</sup> switches depending on the load


Reproducibility is ±0.05mm under same geometrical conditions according to one switch device.

**ATTENTION :**

The measures of the switching points are related to a fluid-tight of 1 g/cm<sup>3</sup>  
The tolerance of the switching points are ±2 mm

**Wiring diagram**

( matching to the drawing )



**Mechanical Data :**

- terminal box material : GD-AISI12 ( 3.2581.05 )
- switching tube material : X 6 CrNiMoTi 17 12 2 ( 1.4571 )
- float material : POM
- tightness : about 0.7 g/cm<sup>3</sup> ±10%
- depth of immersion : 18 mm ±2 mm ( to a fluid-tight of 1 g/cm<sup>3</sup> )
- guard ring material : X 6 CrNiMoTi 17 12 2 ( 1.4571 )
- gasket material : NBR

created 20.09.2002 Häßler  
checked 20.09.2002 Limbach

This copy will not be amended or withdraw when technical changes are necessary.