


Technical Data

Float Switch


Standard float switches

Description **MAA-723 LOS 0699**


Article number **6826109005**

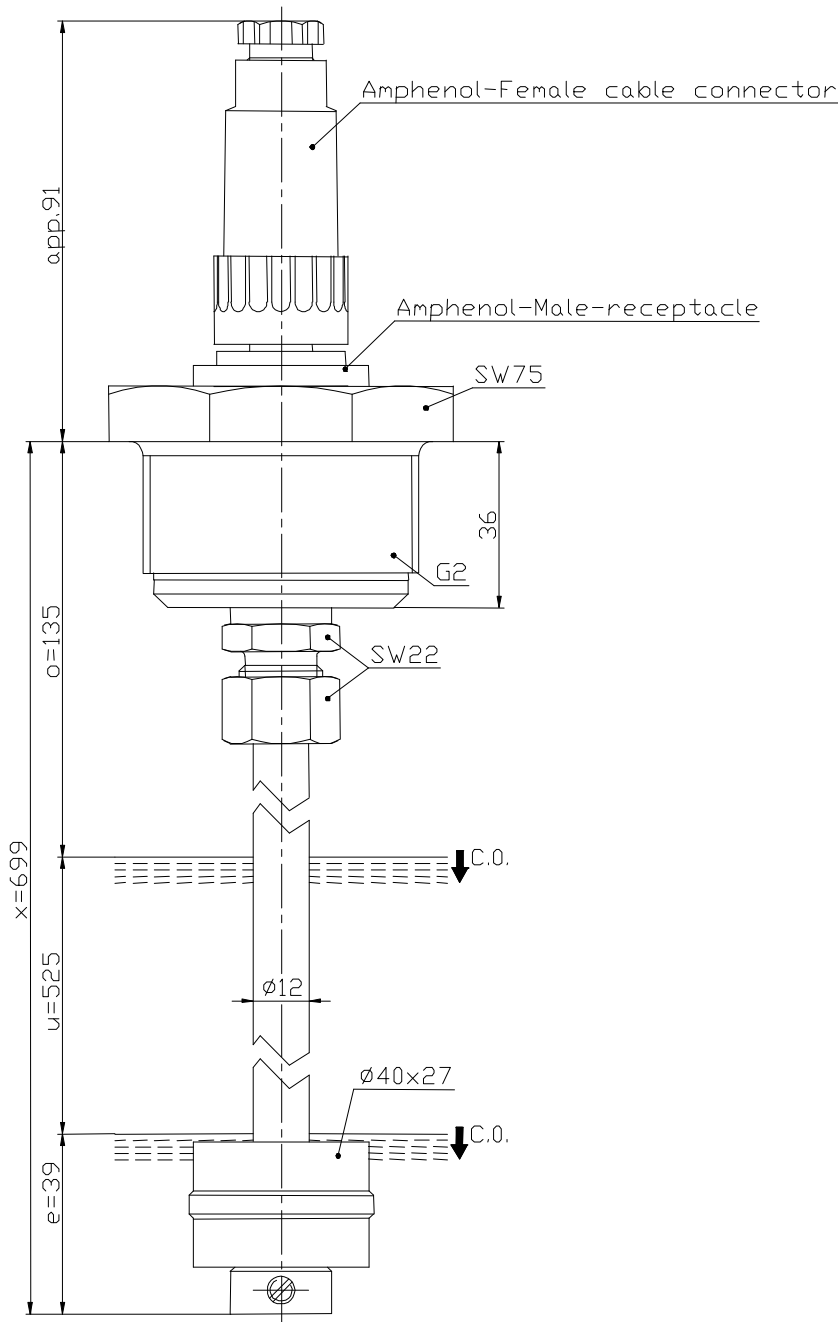

Performance diagram
(maximum data)

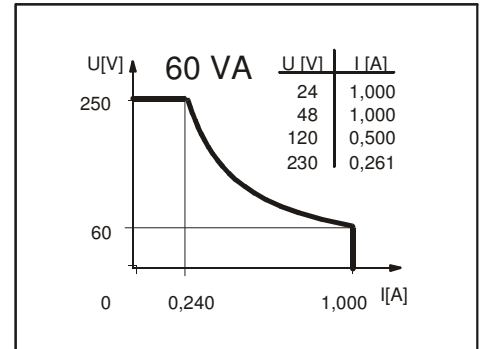

Wiring diagram
(without liquid)

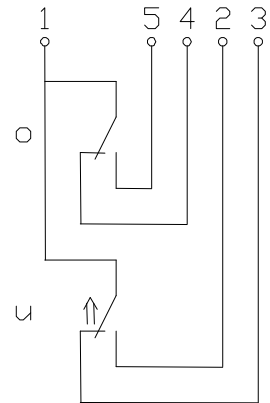

Subject to change without notice.

Standard float switches

Description **MAA-723 LOS 0699** Article number **6826109005**

Electrical data

Reed contact	max. switching voltage	250 V
	max. switching current	1,0 A
	max. switching capacity	60 VA
	mechanical life	10 ⁷ to 10 ⁹ switches depending on the load
Switching element		2 change over contact, falling level
Direction category		AC-21A and DC-21A acc. to DIN VDE 0660 T107
Standard		acc. to DIN VDE 0660 T200

Mechanical data

Screw connection material SW75	PVC
Screw connection material SW22	X6CrNiMoTi17 12 2 (1.4571)
Switching tube material	X6CrNiMoTi17 12 2 (1.4571)
Float material	POM
-density	about 0,7 g/cm ³ ±10%
-depth of immersion	18 mm ±2 mm (to a fluid-density of 1 g/cm ³)
Adjusting ring material	X6CrNiMoTi17 12 2 (1.4571)
Gasket material	NBR
Ambient air temperature	-5°C to +60°C
Liquid temperature	-5°C to +60°C
Connection	Amphenol-connector, Typ: C16-1, 6-pole
Protection type	IP 65 acc. to DIN VDE 0470 T1 <u>only with female socket</u>
Max. pressure	5 bar

General details

Repeatability of switching points is ±0,05mm based on the same geometrical conditions as of a switch device.
The measures of the switching points refer to a fluid-density of 1 g/cm³.
The tolerance of the switching points is ±2mm
Pay attention to the contact protection, when switching inductive loads. Maximum data must not be exceeded!