


**Wiring diagram**

( matching to the drawing )

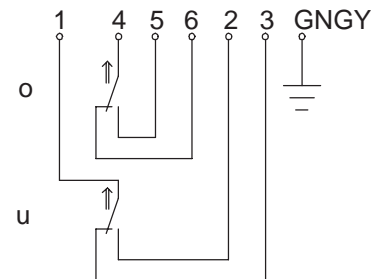

**Electrical Data ( maximum data ) :**

- contact
  - max. voltage : 250 V
  - max. switching current : 1.0 A
  - max. switching capacity : 60 VA
- switching function : change-over contact, falling level  
change-over contact, falling level
- direction category : AC-21A and DC-21A  
acc. to DIN VDE 0660 T107  
( IEC 947-3-1 / EN 60947-3-1 )
- standard : acc. to DIN VDE 0660 T200  
( IEC 947-5-1 / EN 60947-5-1 )

**Pay attention to the contact protection, when switching inductive loads. Maximum data must not be exceeded !**

**Technical Data :**


- mode of connection : 5 m cable, PVC, 7x 0,5 mm<sup>2</sup>
- protection type : IP 65 acc. to DIN VDE 0470 T1  
( IEC 529 / EN 60529 )
- temperature range : form -5°C to +60°C
- fluid temperature : form -5°C to +60°C
- max. pressure : 10 bar
- mech. lifetime : 10<sup>7</sup> to 10<sup>9</sup> switches depending on the load

Reproducibility is ±0.05mm under same geometrical conditions according to one switch device.

**ATTENTION :**

The measures of the switching points are related to a fluid-tight of 1 g/cm<sup>3</sup>  
The tolerance of the switching points are ±2 mm

**Performance diagram**  
( maximum data )

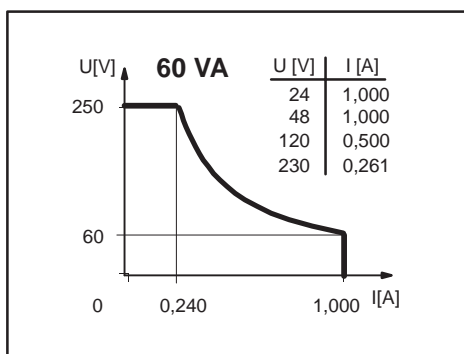

**Mechanical Data :**

- terminal box material : X 6 CrNiMoTi 17 12 2 (1.4571)
- switching tube material : X 6 CrNiMoTi 17 12 2 (1.4571)
- float material : POM
- tightness : about 0.7 g/cm<sup>3</sup> ±10%
- depth of immersion : 18 mm ±2 mm ( to a fluid-tight of 1 g/cm<sup>3</sup> )
- setting ring material : X 6 CrNiMoTi 17 12 2 (1.4571)

created 13.11.01 Schömbert  
checked 13.11.01 Stomberg