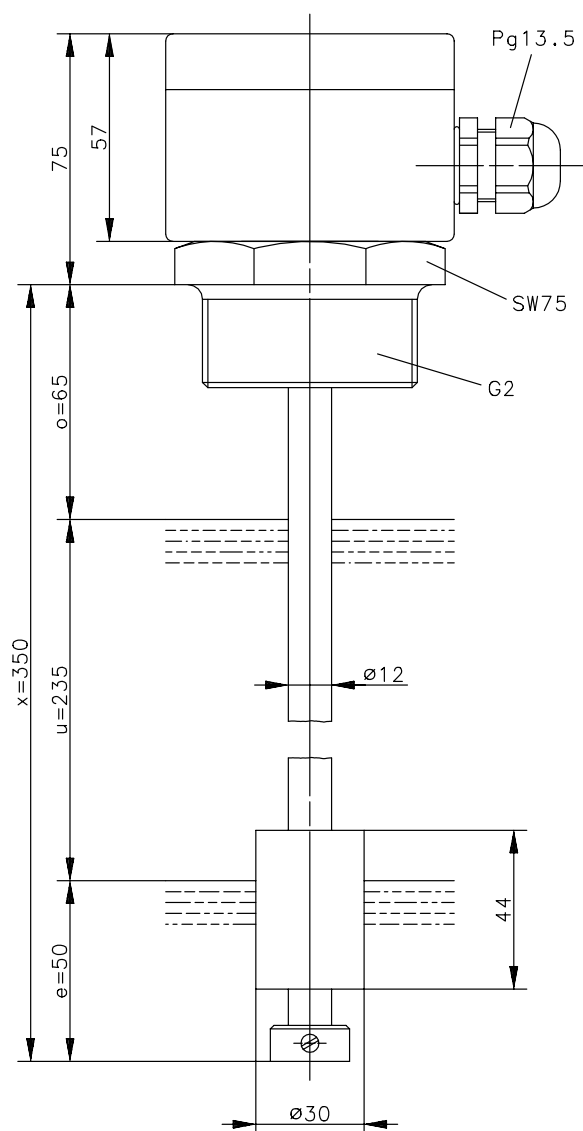
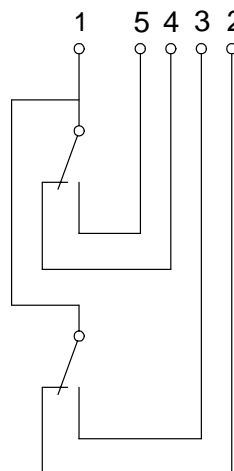
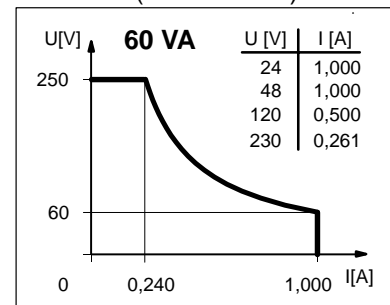


Type: **MAT-723 LCA2S**Art-No.: **682.6169.002**Date: **29.10.98/1316****Wiring diagramme****Switching diagramme**
(max. Value)**Technical Data:**

Max. Voltage : 250 V
 Max. Switch Current : 1.0 A
 Max. Switching : 60 VA
 Direction Category : AC-21A and DC-21A acc.
 DIN VDE 0660 T107
 IEC 947-3-1, EN 60947-3-1

Pay attention to the contact protection, when switching inductive loads.

Protection : IP 65 acc. to DIN VDE 0470
 T1 IEC 529, EN 60529
 Output function : 2 change over contacts,
 falling level
 Temperature range : $-5^{\circ}\text{C} \dots +60^{\circ}\text{C}$
 mech. Lifetime : $10^7 - 10^9$ switchings
 depends the load
 Repeat Accuracy : $\pm 0.05\text{mm}$ (only under same
 geometrical conditions)

Mechanical Data:

Terminal box : G-AISi12
 Tankscrewing : PVC
 Switching tube : 1.4571
 Float : PP
 Adjusting ring : 1.4571
 Standard : acc. DIN VDE 0660 T200
 IEC 947-5-1, EN 60947-5-1