


Technical Data

Float Switch


Standard float switches

Description **MAE-723 LAS 0390**


Article number **6826182006**

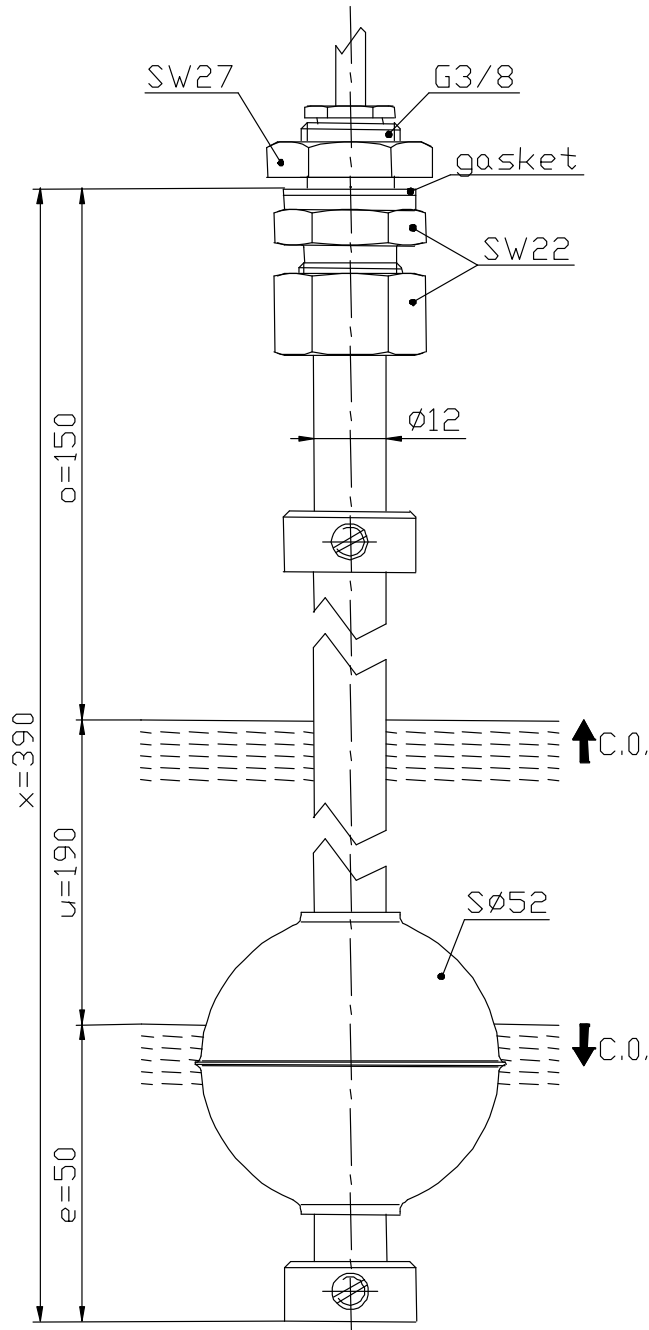

Performance diagram
(maximum data)

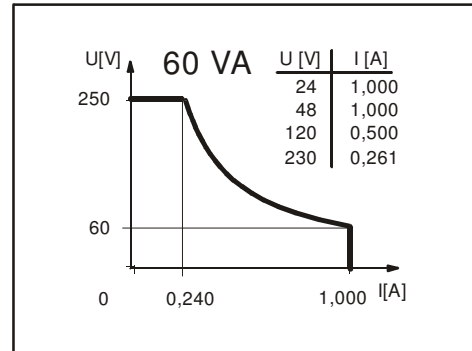

Wiring diagram
(matching to the drawing)

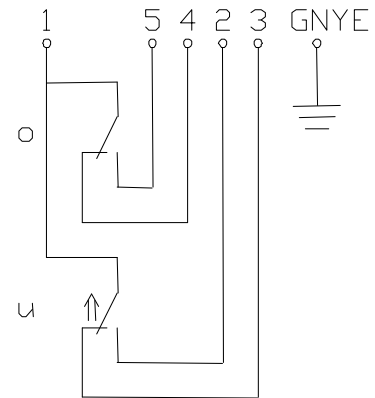

Subject to change without notice.

Date of issue : 08.08.2006 / Page 1 of 2
Document : 6826182006_en.doc / Last update : 1

Standard float switches

Description **MAE-723 LAS 0390** Article number **6826182006**

Electrical data

Reed contact	max. switching voltage	250 V
	max. switching current	1,0 A
	max. switching capacity	60 VA
	mechanical life	10 ⁷ to 10 ⁹ switches depending on the load
Switching element		1 change over contact, rising level 1 change over contact, falling level
Direction category		AC-22A and DC-22A acc to DIN VDE 0660 T107
Standard		acc to DIN VDE 0660 T200

Mechanical data

Screw connection material Pg7	X8CrNiS18-9 (1.4305)	
Screw connection material R3/8	X6CrNiMoTi17-12-2 (1.4571)	
Hexagon nut material	X8CrNiS18-9 (1.4305)	
Switching tube material	X6CrNiMoTi17-12-2 (1.4571)	
Float material	X6CrNiMoTi17-12-2 (1.4571)	
	-density	about 0,65 g/cm ³ ±10%
	-depth of immersion	32 mm ±2 mm (to a fluid-density of 1 g/cm ³)
Adjusting ring material	X6CrNiMoTi17-12-2 (1.4571)	
Gasket material	NBR	
Ambient air temperature	-5 °C to +60 °C	
Liquid temperature	-5 °C to +60 °C	
Connection	2m cable, PVC, 6x0,5mm ²	
Protection type	IP 65 acc to DIN VDE 0470 T1	
Max. pressure	5 bar	

General details

Repeatability of switching points is ±0,05mm based on the same geometrical conditions as of a switch device.
 The measures of the switching points refer to a fluid-density of 1 g/cm³.
 The tolerance of the switching points is ±2mm
 Pay attention to the contact protection, when switching inductive loads. Maximum data must not be exceeded!