





Type: **MAN-734 KNW25**

Art-No.: **683.5100.009**

Date: **30.11.1998/1482**

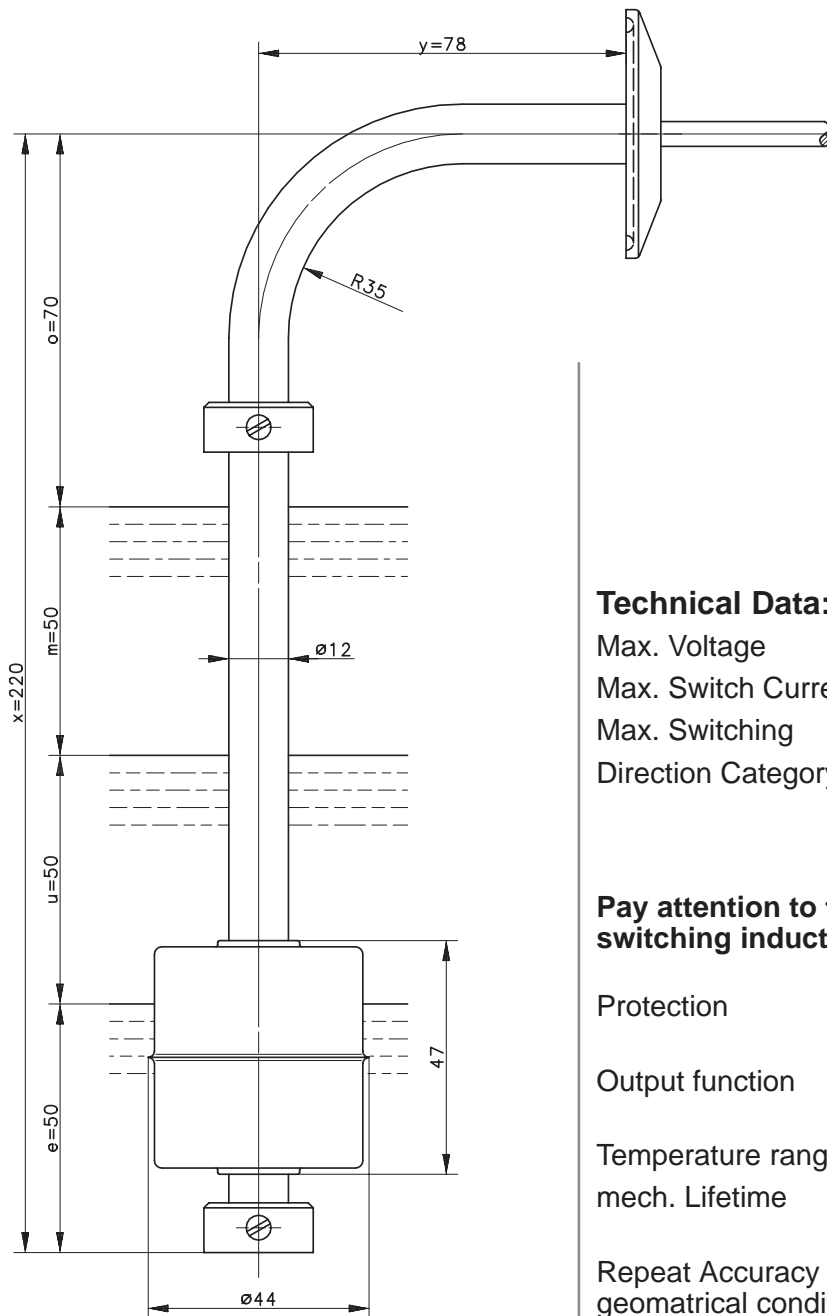

Wiring diagramme

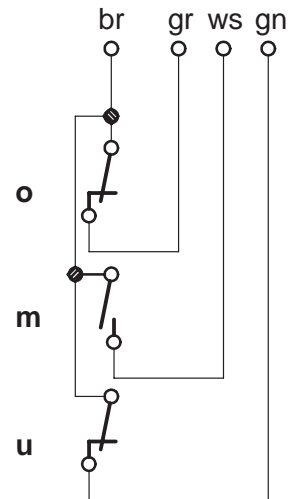


Technical Data:

Max. Voltage : 250 V
 Max. Switch Current : 0.5 A
 Max. Switching : 30 VA
 Direction Category : AC-21A and DC-21A acc.
 DIN VDE 0660 T107
 IEC 947-3-1, EN 60947-3-1

Pay attention to the contact protection, when switching inductive loads.

Protection : IP 65 acc. to DIN VDE 0470
 T1 IEC 529, EN 60529
 Output function : 2 N.C. contacts,
 1 N.O. contact, falling level
 Temperature range : $-5^{\circ}\text{C} \dots +105^{\circ}\text{C}$
 mech. Lifetime : $10^7 - 10^9$ switchings
 depends the load
 Repeat Accuracy : $\pm 0.05\text{mm}$ (only under same
 geometrical conditions)

Switching diagramme
(max. Value)

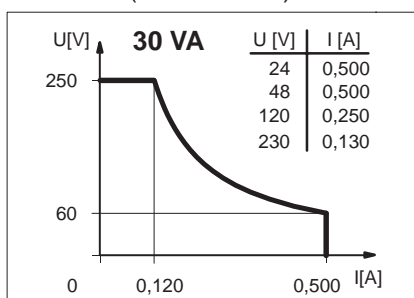

Mechanical Data:

Terminal box : Aseptik-Blindklemmstutzen
 NW25-40, 1.4404
 DIN 32676
 Switching tube : 1.4571
 Float : 1.4571
 Adjusting ring : 1.4571
 TerminationType : 5m PVC-cable 4x0.25mm²
 Standard : acc. DIN VDE 0660 T200
 IEC 947-5-1, EN 60947-5-1