

# Float switch

## Series Standard-Float switch

Description **MAA-734 KSS 0700**

Article number **6835105314**

**Wiring diagram**  
(non-actuated state)

**Performance diagram**

U <sub>M</sub>	I [A]
24	0,500
48	0,500
120	0,250
230	0,130

Technical drawing showing dimensions:  $\phi 77.5$ ,  $\phi 60$ ,  $c \approx 3.5$ ,  $o = 300 \pm 2$ ,  $x = 700 \pm 2$ ,  $m = 300 \pm 2$ ,  $u = 50 \pm 2$ ,  $e = 50 \pm 2$ . Labels include Pg11, gasket,  $4 \times \phi 5.5$ ,  $\phi 20.5$ ,  $\phi 12$ ,  $\phi 40 \times 27$ , N.C., and N.O.

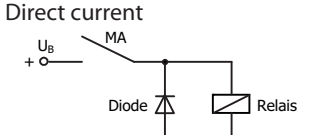
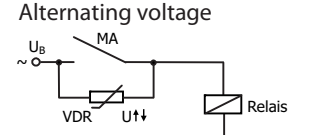
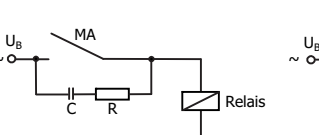
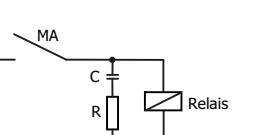
Electrical data		
Rated voltage	$U_r$	250 V
max. switching current		0,5 A
max. switching capacity		30 VA
Rated insulation voltage	$U_i$	300 V AC
Rated impulse withstand voltage	$U_{imp}$	2,5 kV AC
Overvoltage category		II
Switching element		1 N.C., rising level 2 N.O., rising level
Protection class		I

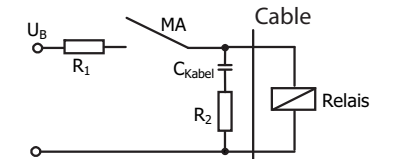


Mechanical data	
Housing material	Aluminium coated RAL 3016
Switching tube material	X6CrNiMoTi17-12-2 (1.4571)
Float material	POM
- density	about 0,7 g/cm <sup>3</sup> ±10 %
- depth of immersion	18 mm ± 2 mm ( to a fluid-density of 1 g/cm <sup>3</sup> )
Adjusting ring material	X6CrNiMoTi17-12-2 (1.4571)
Gasket material	NBR
Ambient air temperature	-5 °C to +60 °C
Liquid temperature	-5 °C to +60 °C
Connection	Connecting block inside the terminal box
Protection type	IP 65 acc to IEC529 / EN 60529
Max. pressure	10 bar

Standards
DIN EN 60947-5-1

EU Conformity
acc. to directive 2014/35/EU (Low-Voltage-Directive)

General details
The measures of the switching points refer to a fluid-density of 1 g/cm <sup>3</sup> . The tolerance of the switching points is ±2 mm Pay attention to the contact protection, when switching inductive or capacitive loads. Maximum data must not be exceeded!

Inductive loads
<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>Direct current</p>  <p>Suppression of voltage peaks with a free-wheeling diode</p> </div> <div style="text-align: center;"> <p>Alternating voltage</p>  <p>Suppression of voltage peaks with a VDR</p> </div> <div style="text-align: center;">  <p>Suppression of voltage peaks with an RC element</p> </div> <div style="text-align: center;">  </div> </div>

Capacitive loads and lamp loads
   <p>Contact protection with resistors for limiting current</p>