

Technical Data


Float Switch

Standard float switches



Description **MAN-733 KBS 0330**

Article number **6835135030**

Wiring diagram
(non activated condition)

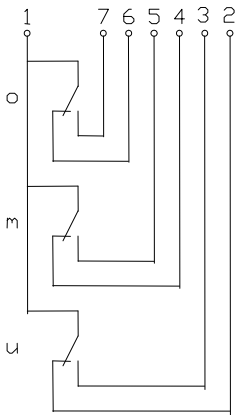

Performance diagram

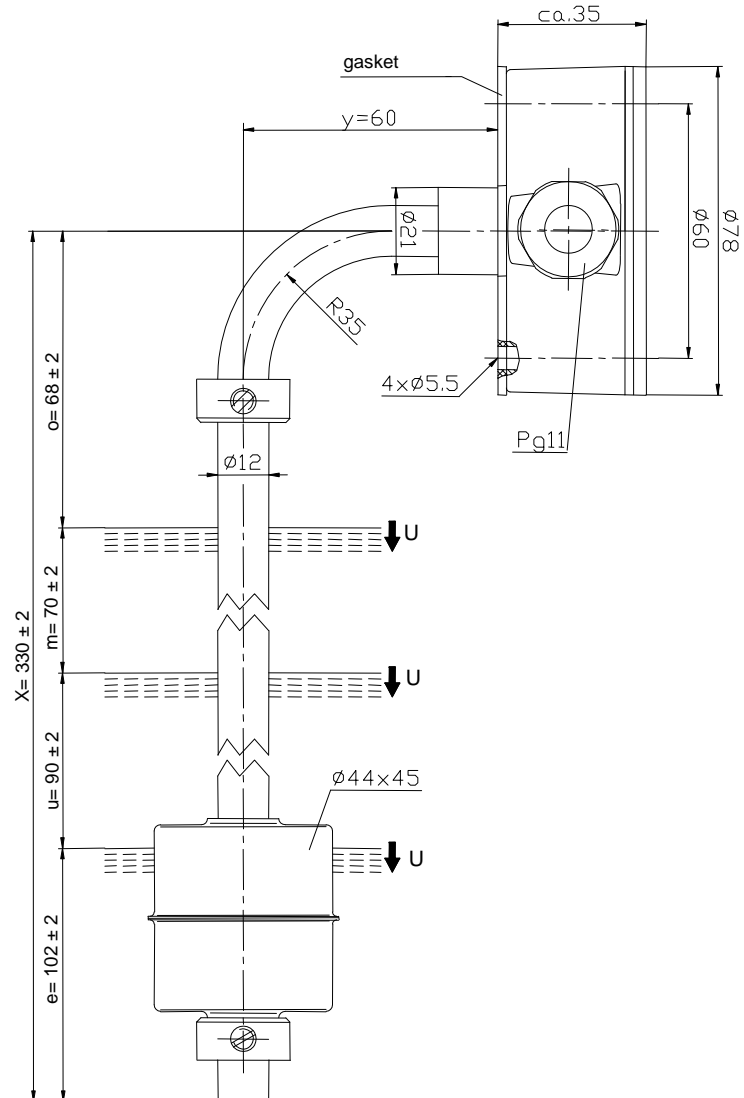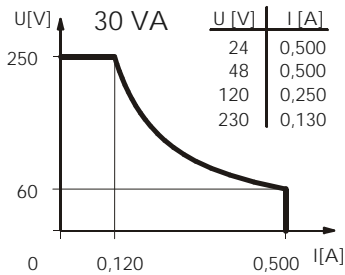

Identifying characteristics in accordance with DIN EN 60947-5-1

Electrical data

max. switching voltage	250 V
max. switching current	0,5 A
max. switching capacity	30 VA
mechanical life	10^7 to 10^9 switches depending on the load
Switching element	3 x change-over contact, falling level
Protection class	I

This document will not become the contractual basis; the details included herein do not constitute any descriptions of expected conditions, so that warranties/claims for defects on account of possible variations of the actual qualities from the qualities described herein are explicitly excluded. All rights reserved. Specifications subject to change without notice!

Date of issue : 27.03.2013 / Page 1 of 2
Document : 6835135030_en / Last update : 1 / 0145-13

Mechanical data

Terminal box material	GK-AL SI 12 (3.2581.02)
Switching tube material	X6CrNiMoTi17 12 2 (1.4571)
Float material	X6CrNiMoTi17 12 2 (1.4571)
-density	about 0,7 g/cm ³ ±10%
-depth of immersion	33 mm ±2 mm (to a fluid-density of 1 g/cm ³)
Adjusting ring material	X6CrNiMoTi17 12 2 (1.4571)
Gasket material	NBR
Ambient air temperature	-5°C bis +100°C
Liquid temperature	-5°C bis +120°C
Connection	connecting block inside the terminal box
Protection type	IP 65 acc to IEC 529 / EN 60529
Max. pressure	10 bar

EU Conformity

acc. to directive 2006/95/EC

General details

Repeatability of switching points is $\pm 0,05\text{mm}$ based on the same geometrical conditions as of a switch device.


The measures of the switching points refer to a fluid-density of 1 g/cm³.

The tolerance of the switching points is $\pm 2\text{mm}$

Pay attention to the contact protection, when switching inductive and capacitive loads. Maximum data must not be exceeded!


Inductive loads

Direct current

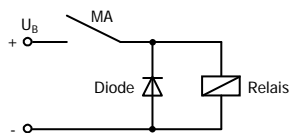


Suppression of voltage peaks with a free-wheeling diode


Alternating voltage

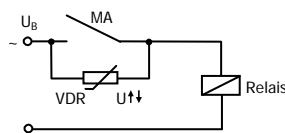


Suppression of voltage peaks with a VDR

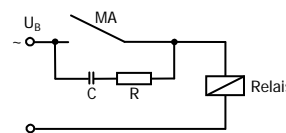



Suppression of voltage peaks with an RC element

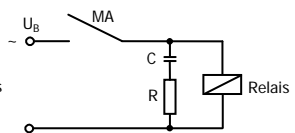

Capacitive loads and lamp loads

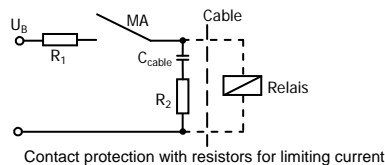

Contact protection with resistors for limiting current



This document will not become the contractual basis; the details included herein do not constitute any descriptions of expected conditions, so that warranties/claims for defects on account of possible variations of the actual qualities from the qualities described herein are explicitly excluded. All rights reserved. Specifications subject to change without notice!

Date of issue : 27.03.2013 / Page 2 of 2
Document : 6835135030_en / Last update : 1 / 0145-13