


# Technical Data

## Float Switch


### Standard float switches

Description **MAD-732 KF075S 0626**


Article number **6835370002**

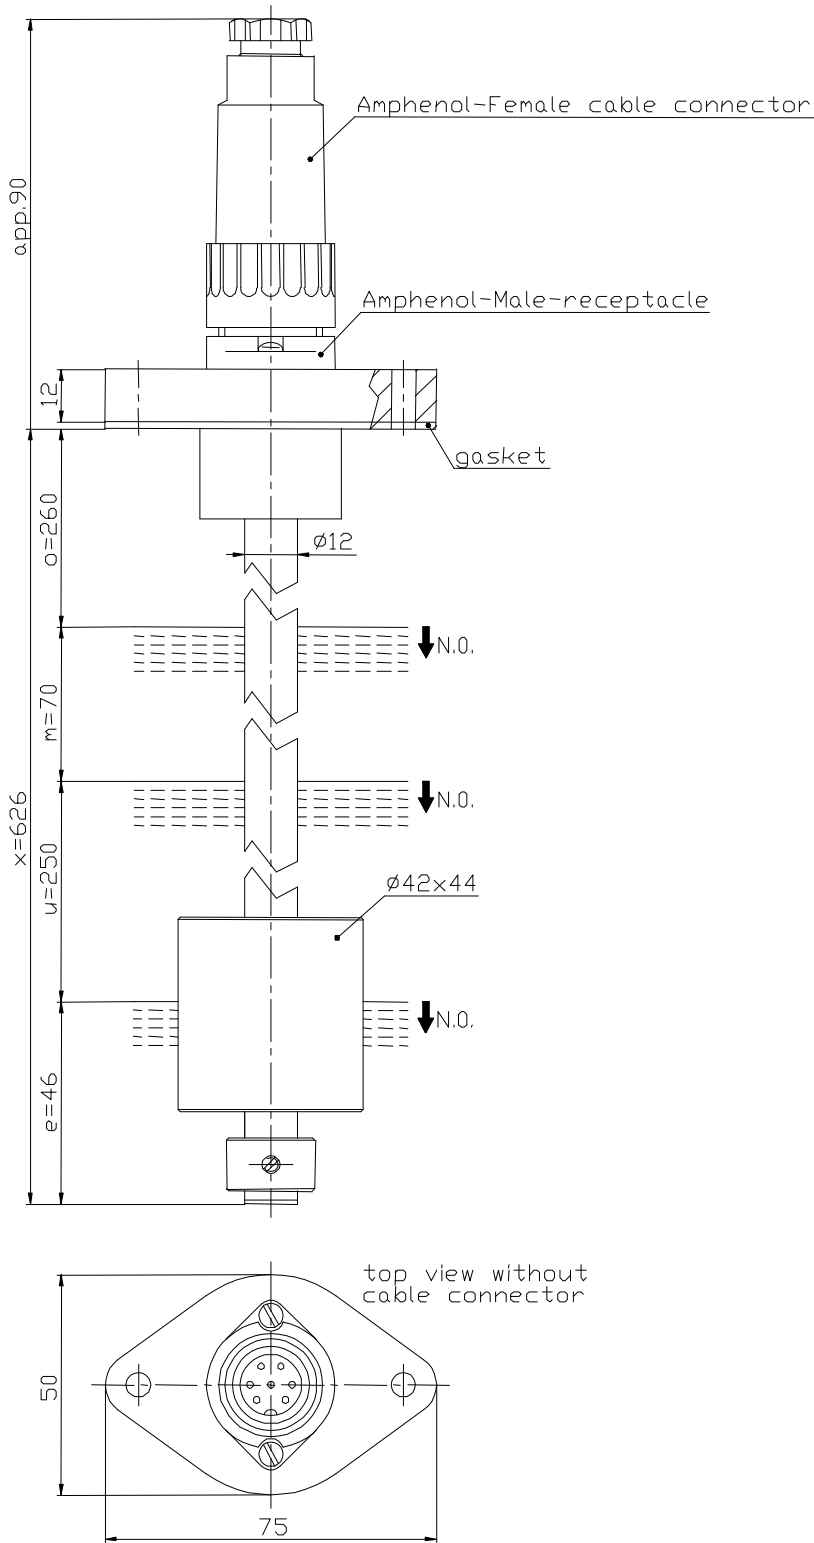

**Performance diagram**  
(maximum data)

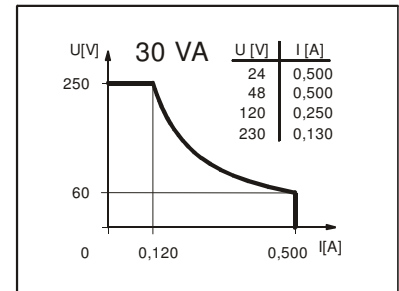

**Wiring diagram**  
(matching to the drawing)

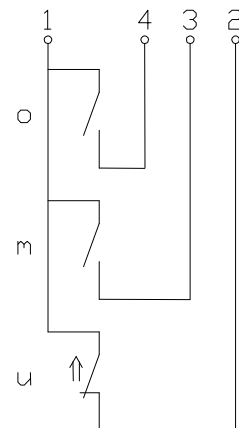

Subject to change without notice.

### Standard float switches

Description      **MAD-732 KF075S 0626**      Article number      **6835370002**

#### Electrical data

Reed contact	max. switching voltage	250 V
	max. switching current	0,5 A
	max. switching capacity	30 VA
	mechanical life	10 <sup>7</sup> to 10 <sup>9</sup> switches depending on the load
Switching element		3 normally open contact, falling level
Direction category		AC-22A and DC-22A acc to DIN VDE 0660 T107
Standard		acc to DIN VDE 0660 T200

#### Mechanical data

Flange material	PVC	
Switching tube material	PVC	
Float material	PVC	
	-density	about 0,6 g/cm <sup>3</sup> ±10%
	-depth of immersion	25 mm ±2 mm ( to a fluid-density of 1 g/cm <sup>3</sup> )
Adjusting ring material	PVC	
Gasket material	NBR	
Ambient air temperature	-5°C to +60°C	
Liquid temperature	-5°C to +60°C	
Connection	Amphenol-connector, Typ: C16-1, 6-pole	
Protection type	IP 65 acc to DIN VDE 0470 T1	
	<u>only with female socket</u>	
Max. pressure	5 bar	

#### General details

Repeatability of switching points is ±0,05mm based on the same geometrical conditions as of a switch device.

The measures of the switching points refer to a fluid-density of 1 g/cm<sup>3</sup>.

The tolerance of the switching points is ±2mm

Pay attention to the contact protection, when switching inductive loads. Maximum data must not be exceeded!