


Float switch

Series Miniature-Float switch

Description **MSK2-NI-R3/8ST-3S 0375**

Article number **6891127002**

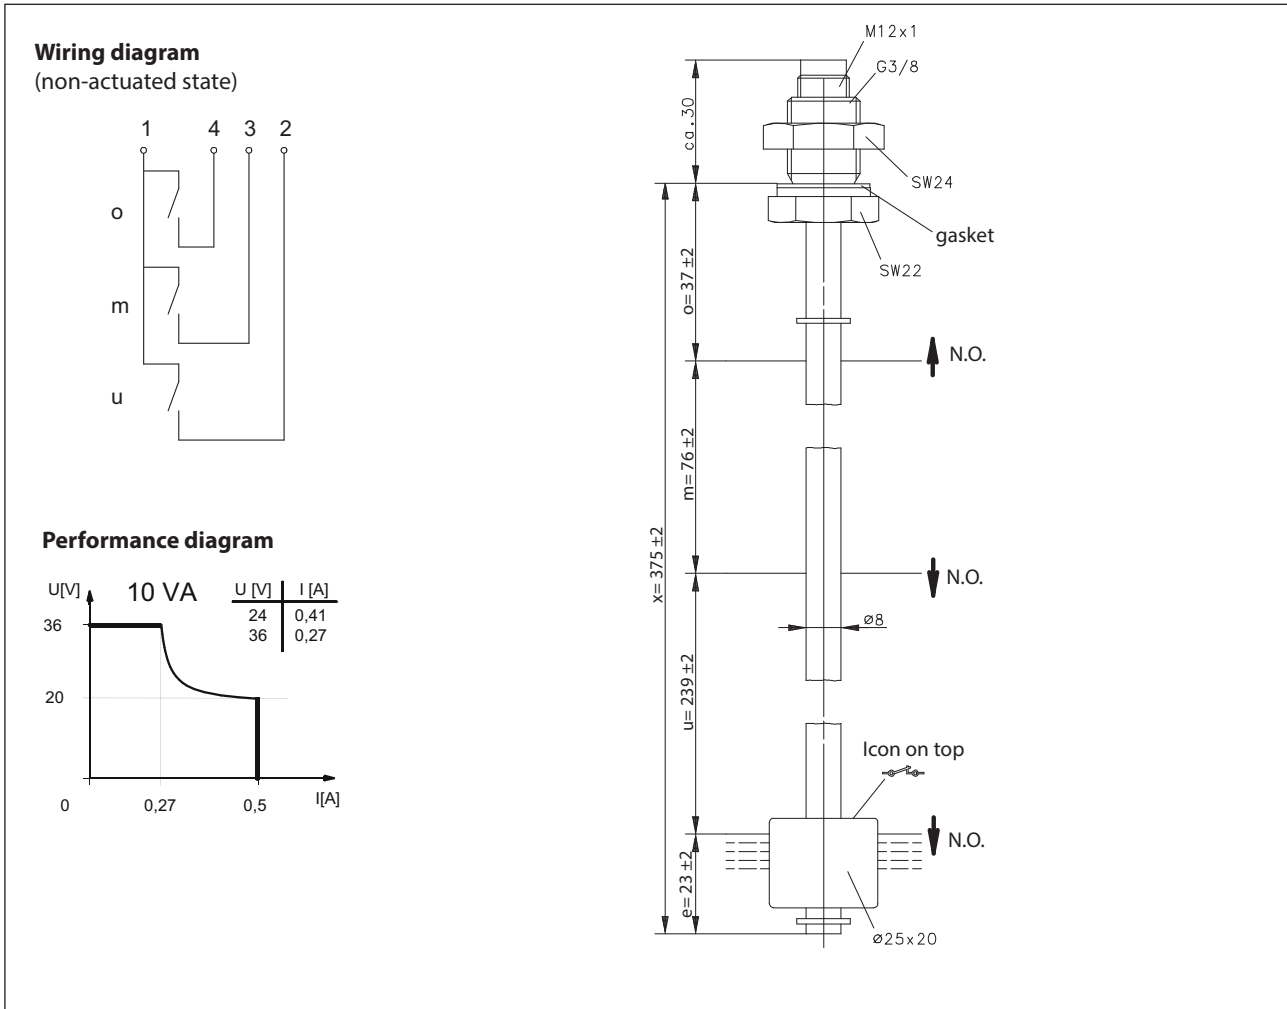

Characteristic features in accordance with EN 60947-5-1

Electrical data	
max. switching voltage	250 V
max. switching current	0,5 A
max. switching capacity	10 VA
mechanical life	10 ⁷ to 10 ⁹ switches depending on the load
Switching element	o= N.O., rising level m= N.O., falling level u=N.O., falling level
Protection class	II (totally insulated)

Mechanical data	
Bolting material	X6CrNiMoTi-17-12-2 (1.4571)
Hexagon nut material	X6CrNiMoTi-17-12-2 (1.4571)
Switching tube material	X6CrNiMoTi-17-12-2 (1.4571)
Float material	PVC
- density	about 0,7 g/cm ³ ±10 %
- depth of immersion	15 mm ± 2 mm (to a fluid-density of 1 g/cm ³)
Grip screw material	X35CrMo17 (1.4122)
Gasket material	NBR
Ambient air temperature	-5 °C to +60 °C
Liquid temperature	-5 °C to +60 °C
Connection	M12 x 1 connector 4-pole DC
Protection type	IP 65 acc to IEC529 / EN 60529 (only in fully locked position with it's plugs)
Max. pressure	5 bar

General details

Repeatability of switching points is ±0,05 mm based on the same geometrical conditions as of a switch device.
 The measures of the switching points refer to a fluid-density of 1 g/cm³.
 The tolerance of the switching points is ±2 mm
 Maximum data must not be exceeded!
 Pay attention to the contact protection, when switching inductive or capacitive loads.

