

Technical Data


Float Switch

Mini level float switches



Description **MSN1-NI-R3/8-2O 0143**

Article number **6891173042**

Wiring diagram
(non activated condition)

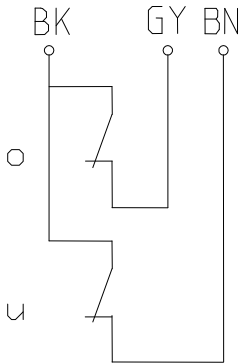

Performance diagram

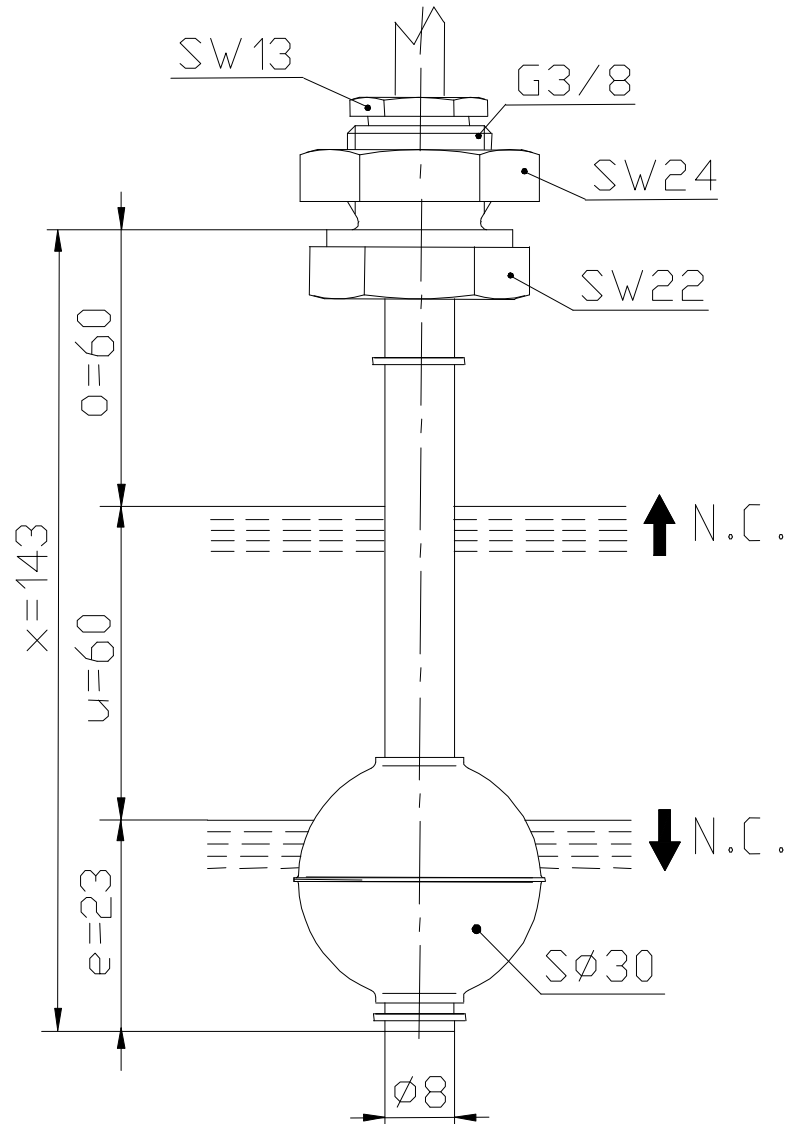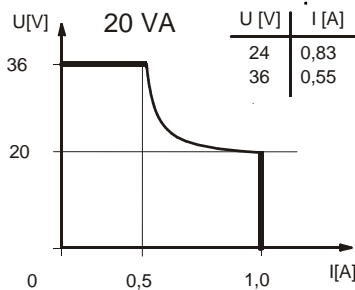

Characteristic features in accordance with EN 60947-5-1

Electrical data

Operational voltage range	U_B	10 - 36 V
max. switching current		1,0 A
max. switching capacity		20 VA
mechanical life		10^7 to 10^9 switches depending on the load
Switching element		1 x normally-closed contact, rising level 1 x normally-closed contact, falling level
Protection class		III

This document will not become the contractual basis; the details included herein do not constitute any descriptions of expected conditions, so that warranties/claims for defects on account of possible variations of the actual qualities from the qualities described herein are explicitly excluded. All rights reserved. Specifications subject to change without notice!

Date of issue : 27.06.2013 / Page 1 of 2
Document : 6891173042_en / Last update : 1 / 6577-13

Mechanical data

Screw connection material Pg7	X8CrNiS18-9 (1.4305)
Screw connection material G3/8	X6CrNiMoTi17-12-2 (1.4571)
Hexagon nut material	X8CrNiS18-9 (1.4305)
Switching tube material	X6CrNiMoTi17-12-2 (1.4571)
Float material	X6CrNiMoTi17-12-2 (1.4571)
-density	about 0,65 g/cm ³ ±10%
-depth of immersion	18 mm ±2 mm (to a fluid-density of 1 g/cm ³)
Adjusting ring material	X39CrMo17-1 (1.4122)
Gasket material	NBR
Ambient air temperature	-5°C to +100°C
Liquid temperature	-5°C to +100°C
Connection	Cable 3x0,5 mm ² x 2m ± 5 %, Silicon
Protection type	IP 65 acc to IEC529 / EN 60529
Max. pressure	5 bar

General details

Repeatability of switching points is ±0,05mm based on the same geometrical conditions as of a switch device.


The measures of the switching points refer to a fluid-density of 1 g/cm³.

The tolerance of the switching points is ±2mm

Pay attention to the contact protection, when switching inductive or capacitive loads. Maximum data must not be exceeded!


Inductive loads

Direct current




Suppression of voltage peaks with a free-wheeling diode


Alternating voltage

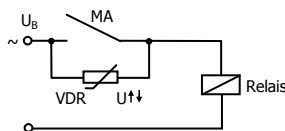




Suppression of voltage peaks with a VDR



Suppression of voltage peaks with an RC element



Capacitive loads and lamp loads

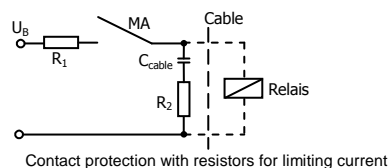

This document will not become the contractual basis; the details included herein do not constitute any descriptions of expected conditions, so that warranties/claims for defects on account of possible variations of the actual qualities from the qualities described herein are explicitly excluded. All rights reserved. Specifications subject to change without notice!

Date of issue : 27.06.2013 / Page 2 of 2
Document : 6891173042_en / Last update : 1 / 6577-13