





Type: **MSK3-MS-R1/8-S2 0270**

Art-No.: **689.1231.017**

Date: **19.08.1999/2174**

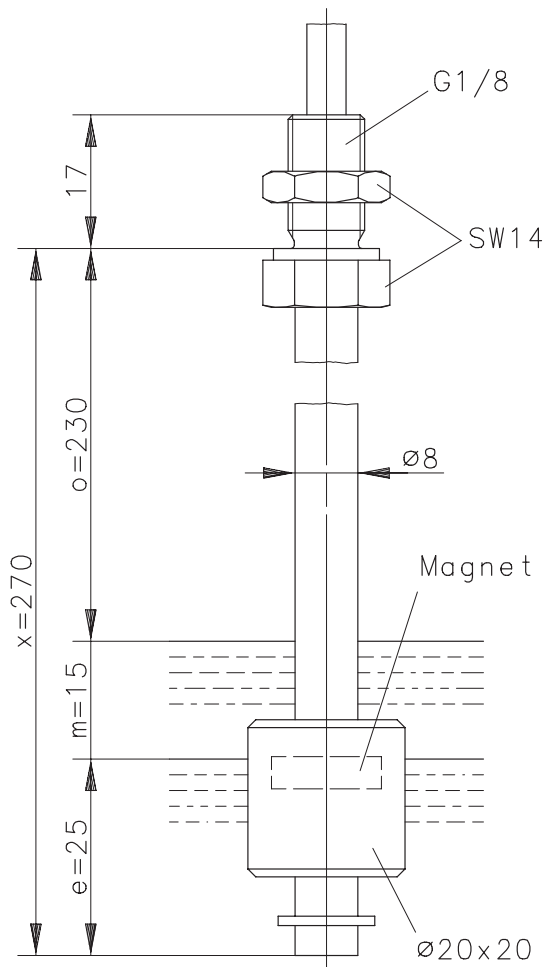

Performance diagram
(maximum data)

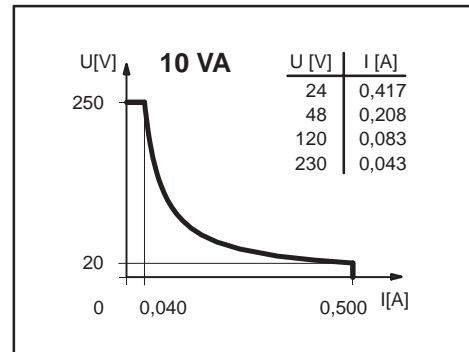

Technical Data (maximum data) :


Max. Voltage : 250 V
 Max. Switch current : 0.5 A
 Max. Switching : 10 VA
 Direction category : AC-21A and DC-21A
 acc. to DIN VDE 0660 T107,
 (IEC 947-3-1, EN 60947-3-1)

Pay attention to the contact protection, when switching inductive loads. Maximum data must not be exceeded !

Protection type : IP 65 acc. to DIN VDE 0470 T1,
 (IEC 529, EN 60529)
 Switching function : 2 normally-open contacts, falling level
 Temperature range : form -5°C to +105°C
 mech. Lifetime : 10⁷ to 10⁹ switches depending
 on the load

Reproducibility is ±0.05mm under same geometrical conditions according to one switch device.

Wiring diagramme

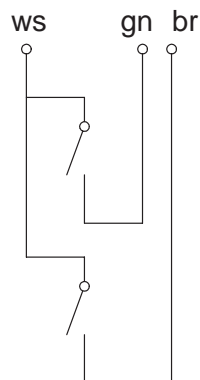

Mechanical Data :

Housing : CuZn37 (2.0321)
 Float : NBR
 Adjusting ring : CuSn8 (2.1030)
 Standard : acc. to DIN VDE 0660 T200,
 (IEC 947-5-1, EN 60947-5-1)