

# Technical Data


## Float Switch

### Miniatur float switches



Description **MSK2-PVC-R1/8-OS 0300**

Article number **6891321020**

#### Wiring diagram

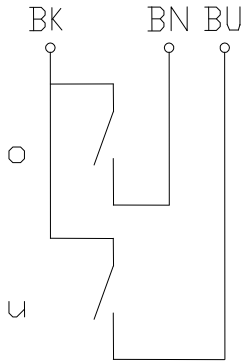

#### Performance diagram

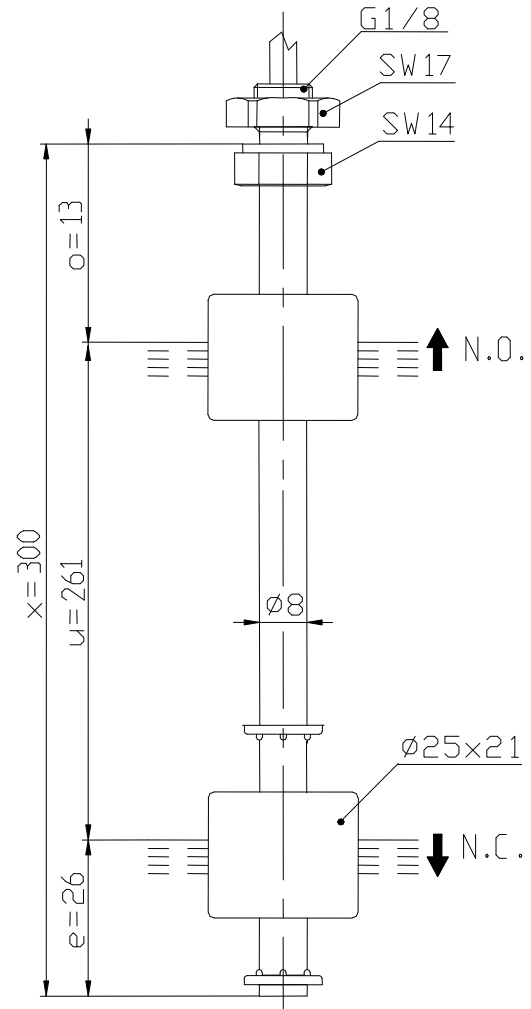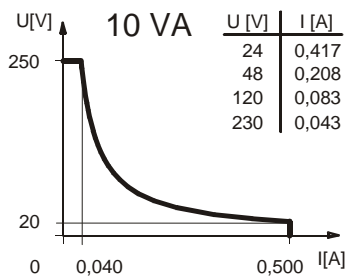

### Characteristic features in accordance with EN 60947-5-1

#### Electrical data

max. switching voltage	250 V
max. switching current	0,5 A
max. switching capacity	10 VA
mechanical life	10 <sup>7</sup> to 10 <sup>9</sup> switches depending on the load
Switching element	1 x normally-open contact, rising level 1 x normally-closed contact, falling level
Protection class	II (protective insulation)

This document will not become the contractual basis; the details included herein do not constitute any descriptions of expected conditions, so that warranties/claims for defects on account of possible variations of the actual qualities from the qualities described herein are explicitly excluded. All rights reserved. Specifications subject to change without notice!

Date of issue : 17.09.2013 / Page 1 of 2  
Document : 6891321020\_en / Last update : 1 / 6634-13

# Technical Data

## Float Switch

### Mechanical data

Screw connection material	PVC
Hexagon nut material	PP
Switching tube material	PVC
Float material	PVC
-density	about 0,7 g/cm <sup>3</sup> ±10%
-depth of immersion	17 mm ±2 mm ( to a fluid-density of 1 g/cm <sup>3</sup> )
Adjusting ring material	PVC
Gasket material	NBR
Ambient air temperature	-5°C to +60°C
Liquid temperature	-5°C to +60°C
Connection	Cable 3x0,34 mm <sup>2</sup> x 2m ± 5 %, PVC
Protection type	IP 65 acc to IEC529 / EN 60529
Max. pressure	5 bar

### EC Conformity

acc. to Directive 2006/95/EC

### General details

Repeatability of switching points is ±0,05mm based on the same geometrical conditions as of a switch device.


The measures of the switching points refer to a fluid-density of 1 g/cm<sup>3</sup>.

The tolerance of the switching points is ±2mm

Pay attention to the contact protection, when switching inductive or capacitive loads. Maximum data must not be exceeded!


### Inductive loads

Direct current

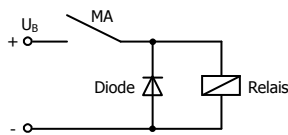


Suppression of voltage peaks with a free-wheeling diode


Alternating voltage

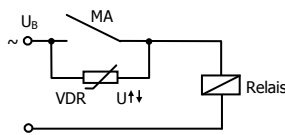


Suppression of voltage peaks with a VDR

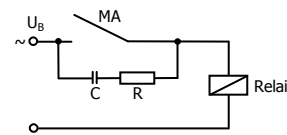



Suppression of voltage peaks with an RC element

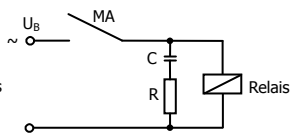

### Capacitive loads and lamp loads

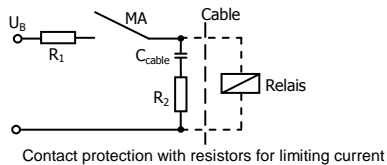

Contact protection with resistors for limiting current



This document will not become the contractual basis; the details included herein do not constitute any descriptions of expected conditions, so that warranties/claims for defects on account of possible variations of the actual qualities from the qualities described herein are explicitly excluded. All rights reserved. Specifications subject to change without notice!

Date of issue : 17.09.2013 / Page 2 of 2  
Document : 6891321020\_en / Last update : 1 / 6634-13