
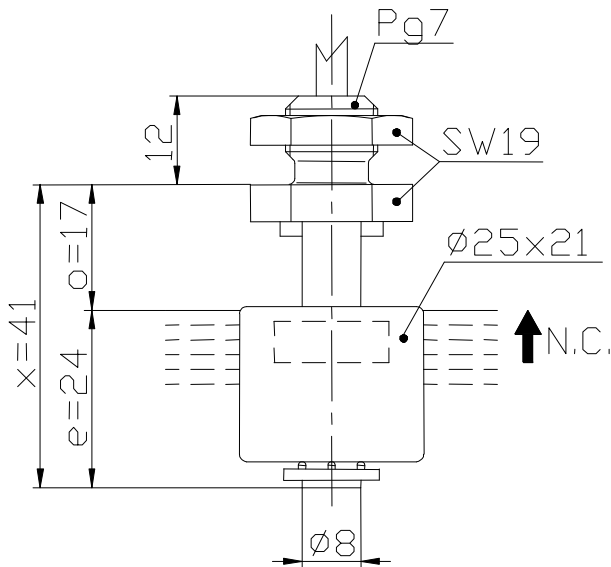


Mini-level float switches


Description **MSK2-PVC-PG7-O 0040**

Article number **6891324021**

Performance diagram
(maximum data)

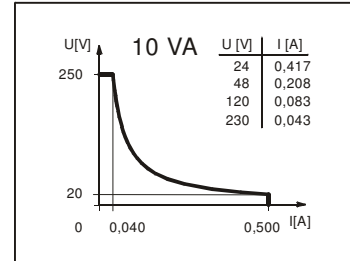

Wiring diagram
(without liquid)



Electrical data

Reed contact	max. switching voltage	250 V
	max. switching current	0,5 A
	max. switching capacity	10 VA
	mechanical life	10 ⁷ to 10 ⁹ switches depending on the load
Switching element		1 normally closed contact, rising level
Direction category		AC-22A and DC-22A acc to DIN VDE 0660 T107
Standard		acc to DIN VDE 0660 T200

Mechanical data

Box material	PVC
Hexagon nut material	PA
Float material	PVC
-density	about 0,75 g/cm ³ ±10%
-depth of immersion	15 mm ±2 mm (to a fluid-density of 1 g/cm ³)
Grip screw material	PVC
Ambient air temperature	-5 °C to +60 °C
Liquid temperature	-5 °C to +60 °C
Connection	5m cable, PVC , 2x0,34mm ²
Protection type	IP 65 acc to DIN VDE 0470 T1
Max. pressure	5 bar

General details

Repeatability of switching points is ±0,05mm based on the same geometrical conditions as of a switch device.
The measures of the switching points refer to a fluid-density of 1 g/cm³.
The tolerance of the switching points is ±2mm
Pay attention to the contact protection, when switching inductive loads. Maximum data must not be exceeded!

Subject to change without notice.

Date of issue : 15.01.2007 / Page 1 of 1
Document : 6891324021_en.doc / Last update : 1