



### Mini-level float switches

Description **MSK1-PP-PG7-S 0040**


Article number **6891414006**

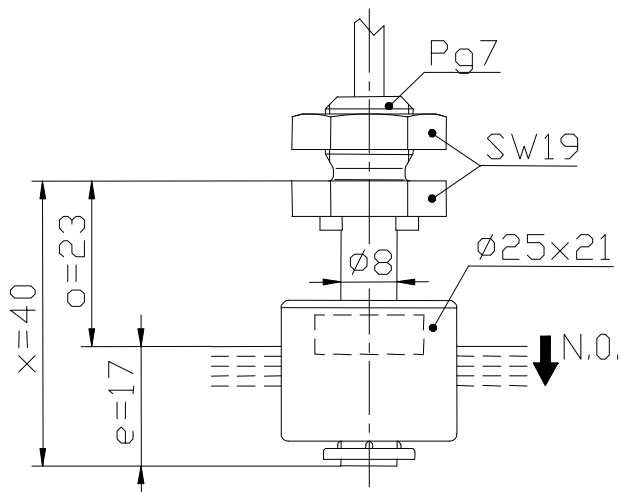

### Performance diagram (maximum data)

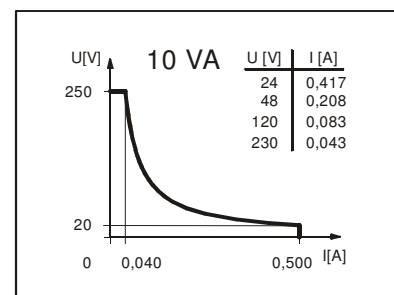

### Wiring diagram (without liquid)



Subject to change without notice.

Date of issue : 05.07.2007 / Page 1 of 2  
Document : 6891414006\_en.doc / Last update : 1

### Mini-level float switches

Description **MSK1-PP-PG7-S 0040** Article number **6891414006**

#### Electrical data

Reed contact	max. switching voltage	250 V
	max. switching current	0,5 A
	max. switching capacity	10 VA
	mechanical life	10 <sup>7</sup> to 10 <sup>9</sup> switches depending on the load
Switching element		1 normally open contact, falling level
Direction category		AC-21A and DC-21A acc. to DIN VDE 0660 T107
Standard		acc. to DIN VDE 0660 T200

#### Mechanical data

Box material		PP
Hexagon nut material		PA
Float material		PP
	-density	about 0,55 g/cm <sup>3</sup> ±10%
	-depth of immersion	12mm ±2 mm ( to a fluid-density of 1 g/cm <sup>3</sup> )
Grip screw material		PP
Ambient air temperature		-5°C to +60°C
Liquid temperature		-5°C to +60°C
Connection		2m cable, PVC, 2x0,34mm <sup>2</sup>
Protection type		IP 65 acc. to DIN VDE 0470 T1
Max. pressure		5 bar

#### General details

Repeatability of switching points is ±0,05mm based on the same geometrical conditions as of a switch device.

The measures of the switching points refer to a fluid-density of 1 g/cm<sup>3</sup>.

The tolerance of the switching points is ±2mm

Pay attention to the contact protection, when switching inductive loads. Maximum data must not be exceeded!