


**PCB Terminal Block**

9.52 mm Pin Spacing

- Board Mount PCB
- 30A Current Rating
- Height 12.5mm
- Modular

**MV49xx-9,52-H**

Top Wire Entry

**Electrical Ratings**

	Usergroup		C		D	
	B	C	D			
Rated Voltage	300V	-	300V			750V
Rated Current	30A	-	30A			32A
Wire Size	<i>solid</i>	30-10 AWG	-	30-10 AWG		0.25mm <sup>2</sup> - 6.0mm <sup>2</sup>
	<i>stranded</i>	30-10 AWG	-	30-10 AWG		0.25mm <sup>2</sup> - 6.0mm <sup>2</sup>

  
E178356




  
N.40019705
**Ordering Information**

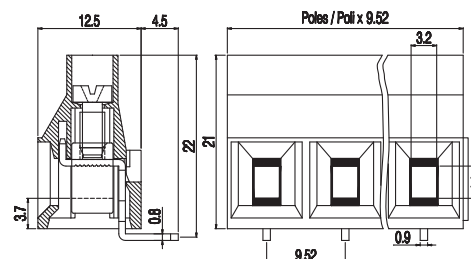
No. Poles	Length (mm)	Std. Pack	Order #
2	19.04	100	MV492-9,52-H
3	28.56	100	MV493-9,52-H
4	38.08	100	MV494-9,52-H
5	47.60	100	MV495-9,52-H
6	57.12	100	MV496-9,52-H
7	66.64	100	MV497-9,52-H
8	76.16	100	MV498-9,52-H
9	85.68	100	MV499-9,52-H
10	95.20	100	MV4910-9,52-H
11	104.72	100	MV4911-9,52-H
12	114.24	100	MV4912-9,52-H

**Material Specifications**

Clamp	Tin-Plated Copper
Solder tab	Tin-Plated Copper
Screw	Galvanized Steel
Insulating Material	Polyamide
Flammability Class	V0 UL94
Operating Temperature	-30°C - +105°C

**Installation Data**

Screw Size	M3
Torque	0.8 Nm (7.2 lb.in.)
Stripping Length	max. 9mm
Clamp Opening	3.2 x 3.9mm
PCB Hole Size	1.3mm

**Dimensions (mm)****Drilling Diagram**