

PCB Terminal Block


7.50 mm Pin Spacing

- Board Mount PCB
- 16A Current Rating
- Height 12.8mm
- Single Mold Terminal



MVE26xx-7,5-V-L

Front Wire Entry



Box Clamp with
Wire Protector

Electrical Ratings

	B	C	D	
Usergroup	B	C	D	-
Rated Voltage	300V	-	300V	750V
Rated Current	26A	-	26A	24A
Wire Size	<i>solid</i> 30-12 AWG <i>stranded</i> 30-12 AWG	-	30-12 AWG	0.25mm ² - 4.0mm ² 0.25mm ² - 2.5mm ²

UL
E178356

IEC

VDE
N.40019705

Ordering Information

No. Poles	Length (mm)	Std. Pack	Order #
2	15.0	100	MVE262-7,5-V-L
3	22.5	100	MVE263-7,5-V-L
4	30.0	100	MVE264-7,5-V-L
5	37.5	100	MVE265-7,5-V-L
6	45.0	100	MVE266-7,5-V-L
7	52.5	100	MVE267-7,5-V-L
8	60.0	100	MVE268-7,5-V-L
9	67.5	100	MVE269-7,5-V-L
10	75.0	100	MVE2610-7,5-V-L
11	82.5	100	MVE2611-7,5-V-L
12	90.0	100	MVE2612-7,5-V-L


Material Specifications

Clamp	Tin-Plated Copper
Solder tab	Tin-Plated Copper
Screw	Galvanized Steel
Insulating Material	Polyamide
Flammability Class	V0 UL94
Operating Temperature	-30°C - +105°C

Installation Data

Screw Size	M3
Torque	0.5 Nm (4.5 lb.in.)
Stripping Length	max. 7.5mm
Clamp Opening	3.0 x 2.5mm
PCB Hole Size	1.5mm

Dimensions (mm)

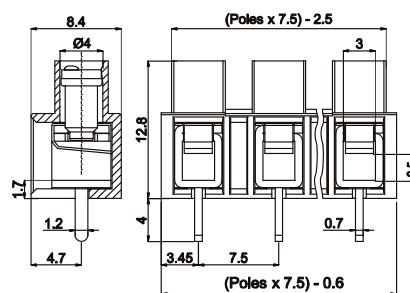

Drilling Diagram

