


**CXK2.5**



**Dimensions**

Width	5 mm
Length	62.2 mm
Height w DIN Rail	35 x 7.5 mm 35 x 15 mm
	38 mm 45.5 mm

**Technical Data/Ratings**

Approvals			
Wire Size (solid   stranded)	<b>24-12 AWG</b>	0.2-2.5 mm <sup>2</sup>	
Voltage Rating	600 V	1000 V	
Current Rating	20A	22A	
Insulation Material	Polyamide 66		

**Installation Instructions**


Wire Stripping Length	10 mm
Screwdriver	0.5x3 mm

**Terminal Blocks**

	Cat. No.	Std. Pk.
<b>Grey (standard)</b>	<b>CXK2.5</b>	50
Red R	CXK2.5/R	50
Blue BU	CXK2.5/BU	50
Black BL	CXK2.5/BL	50
Orange O	CXK2.5/O	50
Green G	CXK2.5/G	50
Yellow Y	CXK2.5/Y	50
White W	CXK2.5/W	50

**Accessories**

	Cat. No.	Std. Pk.
End Plate	EPCX2.5/3	50
Partition Plate	PPCX4/3	20
DIN Rail	2511120 CA701-15/S	20 10
End Stop	CA702 CA802 CA103	50 50 50
Shorting Link/ Jumpers	2 pole JX2.5/2 3 pole JX2.5/3 4 pole JX2.5/4 10 pole JX2.5/10	100 50 50 10
Warning Label	WLX2.5	100
Test Plug	TX2.5	50
Marking Tag	MT5	100

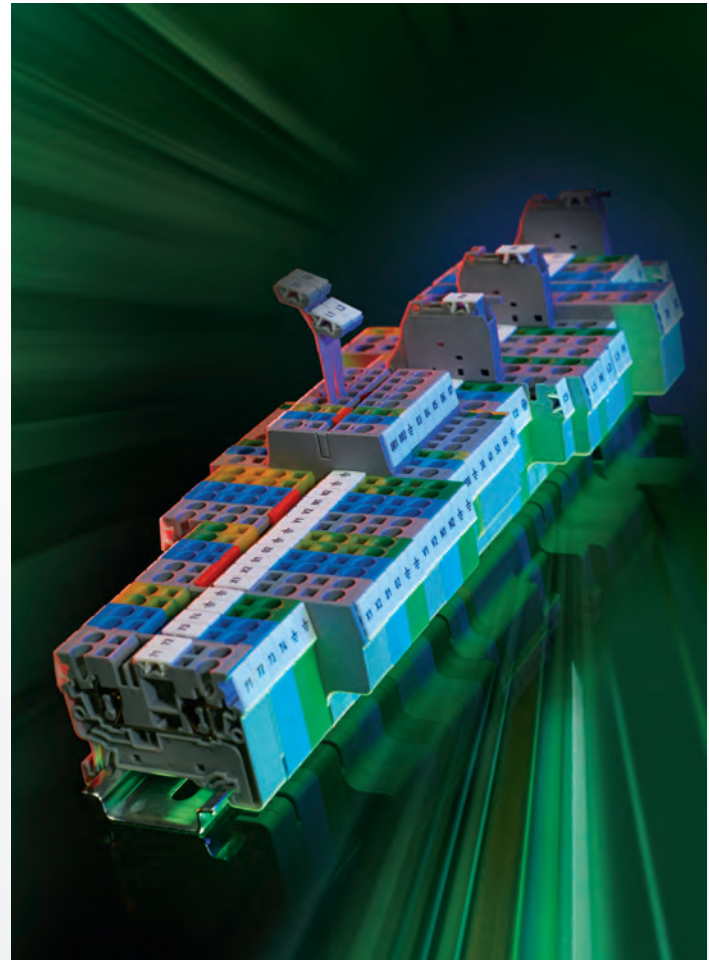

*Assembly example.*