


# Angular Feed-Through Spring Clamp

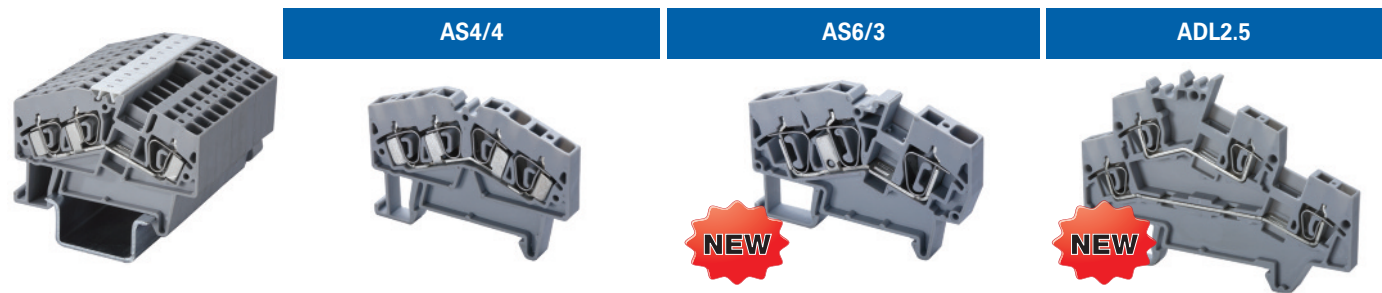

Terminal Width	6 mm			8 mm			5 mm		
Height x Length	42 x 61.5 mm			42 x 74 mm			50 x 79.5 mm		
Stripping Length	15 mm			15 mm			14 mm		
Insulation Material	Polyamide 6.6			Polyamide 6.6			Polyamide 6.6		
Type of Connection	4 spring clamp connection			3 spring clamps & 2 slots for interconnection			4 spring clamps & 4 slots for interconnection		
Approvals									
Wire Range	22-10 AWG	0.2-4 sq.mm.	22-10 AWG	22-8 AWG	0.2-6 sq.mm.	22-8 AWG	22-12 AWG	0.34-2.5 sq.mm	22-12 AWG
Voltage Rating	600 V	800 V	600 V	600 V	800 V	600 V	300 V	800 V	300 V
Current Rating	35 A	32 A	35 A	50 A	41 A	50 A	25 A	24 A	25 A
Other Approvals									

	Cat. No.	Std. Pk.	Cat. No.	Std. Pk.	Cat. No.	Std. Pk.
<b>Terminal Block</b>	<b>AS4/4</b>	100	<b>AS6/3</b>	50	<b>ADL2.5</b>	50
<b>End Plate</b>	EPAS4	50	EPAS6	50	EPADL2.5	50

DIN Rail for ordering information refer to pages 90-91						
<b>End Stop</b> for ordering information refer to page 92	CA103	50	CA103	50	CA103	50
	CA702	50	CA702	50	CA702	50
	CA802	50	CA802	50	CA802	50
<b>Jumpers Adjacent</b>	DOES NOT ACCEPT JUMPERS		CA801/3	100	CA801/1	100
<b>Jumpers Alternate</b>			CA801/3-3	100	CA801/1-3	100
<b>Push in type wire jumper</b>			CA901/3	100	CA901/1	100
<b>Step Down Jumper</b> see page 98			CA901/4	100		
			CA901/6	100		
<b>Marking Tags</b>	MT6	100	MT8	100	MT5	100