

Test Jacks 4 mm System



Type

PKNI 10 B

4mm insulated panel mount binding post with 2.6mm cross hole, nickel plated brass, M6 thread/ solder terminal, max. panel thickness 3.5mm

Pin Diameter

4 mm

PART NO. / Housing color

- 930136100
- 930136101



PKNI 20 B

4mm insulated panel mount binding post with 2.6mm cross hole, nickel plated brass, M6 thread/ solder terminal, max. panel thickness 3.5mm

4 mm

- 930144100
- 930144101

Technical Data

| | |
|---------------------------------|----------------------------------|
| Contact Type | jack Ø 4 mm, cross hole Ø 2.6 mm |
| Connection Type | M6 thread, solder terminal |
| Voltage Rating | 30 VAC / 60 VDC |
| Measurement Category (IEC61010) | CAT I |
| Current Rating* | 63 A |
| Contact Resistance | 2 mOhm |
| Mounting Type | screw thread M6 |

Material Specifications

| | |
|----------------|---------------------|
| Jack Body | nickel plated brass |
| Contact Spring | - |
| Housing | PF |

Environmental Conditions

| | |
|-------------------|---------------------------------|
| Temperature Range | -25°C to +100 °C (-13 to 212°F) |
|-------------------|---------------------------------|

Flamability Rating

| | |
|---------|----------|
| Housing | UL 94 HB |
|---------|----------|

jack Ø 4 mm, cross hole Ø 2.6 mm

| | |
|---------------------------------|----------------------------|
| Connection Type | M6 thread, solder terminal |
| Voltage Rating | 30 VAC / 60 VDC |
| Measurement Category (IEC61010) | CAT I |
| Current Rating* | 63 A |
| Contact Resistance | 2 mOhm |
| Mounting Type | screw thread M6 |

nickel plated brass

-



PF

-25°C to +100 °C (-13 to 212°F)

UL 94 HB

Drawing

Measurements are shown in millimeters.
Multiply by 0.03937 to convert to inches.

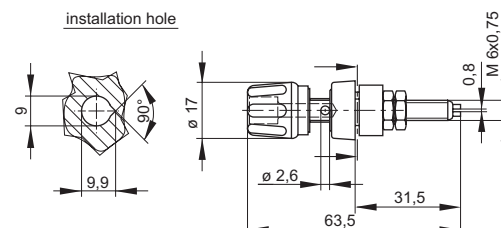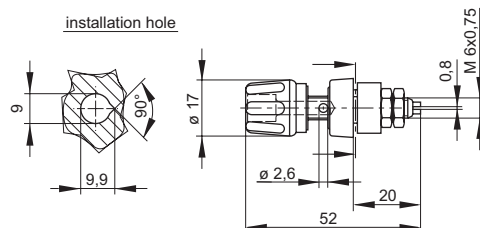

* Please consider derating graph on page 80.