


PCB Plug-In Header

3.81 mm Pin Spacing

- Vertical Header
- 11A Current Rating
- Open Ends




PVxx-3,81

Electrical Ratings			UL E178356	IEC	VDE
Usergroup	B	C	D	-	
Rated Voltage	300V	-	300V	160V	
Rated Current	11A	-	11A	8A	
Wire Size	<i>solid</i>	-	-	-	
	<i>stranded</i>	-	-	-	


Ordering Information (3.81 mm Spacing)

No. Poles	Order #	Length (mm)	Std. Pack
2	PV02-3,81	7.6	100
3	PV03-3,81	11.4	100
4	PV04-3,81	15.2	50
5	PV05-3,81	19.1	50
6	PV06-3,81	22.9	50
7	PV07-3,81	26.7	50
8	PV08-3,81	30.5	50
9	PV09-3,81	34.3	50
10	PV10-3,81	38.1	50
11	PV11-3,81	41.9	50
12	PV12-3,81	45.7	50
13	PV13-3,81	49.5	20
14	PV14-3,81	53.3	20
15	PV15-3,81	57.2	20
16	PV16-3,81	61.0	20
17	PV17-3,81	64.8	20
18	PV18-3,81	68.6	20
19	PV19-3,81	72.4	20
20	PV20-3,81	76.2	20
21	PV21-3,81	80.0	20
22	PV22-3,81	83.8	20
23	PV23-3,81	87.6	20
24	PV24-3,81	91.4	20

Dimensions (mm)

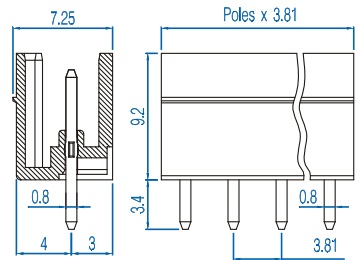

Drilling Diagram

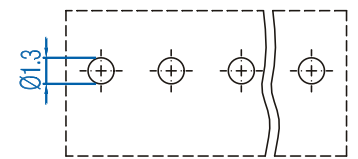

Material Specifications

Solder Tab	Tin-Plated Copper Alloy
Insulating Material	Polyamide
Flammability Class	V0 UL94
Operating Temperature	-30°C - +105°C

Installation Data

PCB Hole Size	1.3 mm
---------------	--------

Mating Plugs

SHxx-3,81	SVFxx-3,81	SVPxx-3,81
-----------	------------	------------