




4 POLE

Standard Pack 3

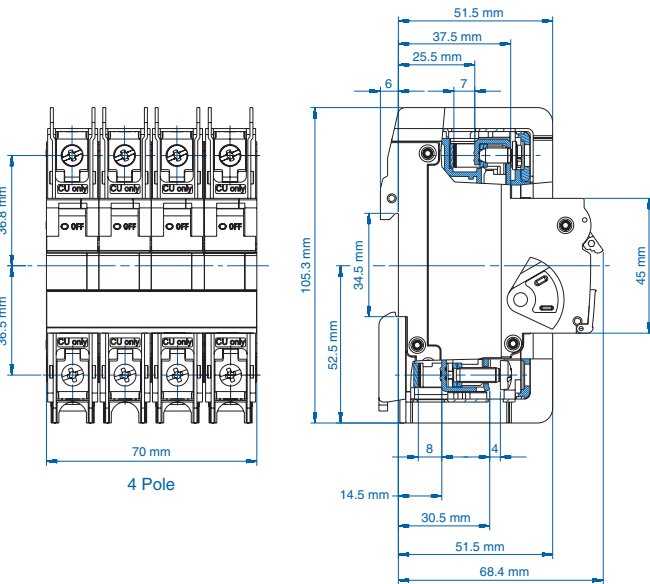

Rated Current (In)	Type/ Cat. No.
0.3A	4D03UL
0.5A	4D05UL
1.0A	4D1UL
1.6A	4D1.6UL
2.0A	4D2UL
3.0A	4D3UL
4.0A	4D4UL
5.0A	4D5UL
6.0A	4D6UL
8.0A	4D8UL
10A	4D10UL
12A	4D12UL
13A	4D13UL
15A	4D15UL
16A	4D16UL
20A	4D20UL
25A	4D25UL
30A	4D30UL
32A	4D32UL
40A	4D40UL
50A	4D50UL
60A	4D60UL
63A	4D63UL

Weight (per piece)

0.3A - 32A:

0.544 - 0.572 kg

1.199 - 1.261 lb


33A - 63A:

0.568 - 0.652 kg

1.252 - 1.437 lb


D Trip Characteristic

$I_n = 0.3A - 10A$ rated current

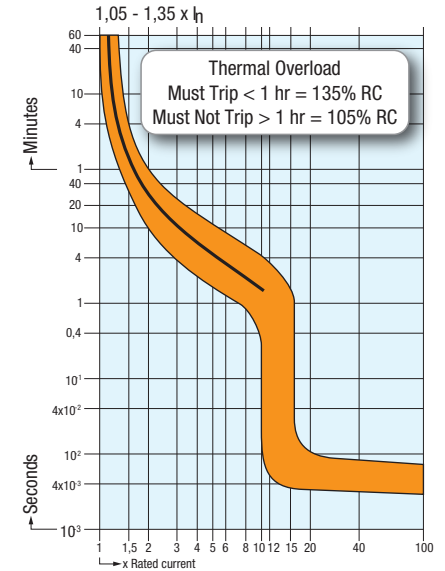

D Trip Characteristic

$I_n = 12A - 63A$ rated current

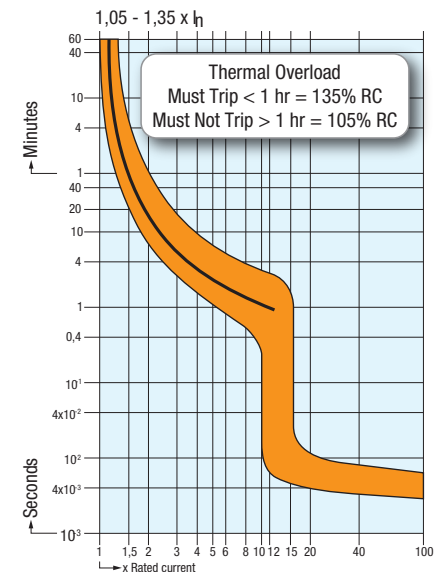

Specifications

Current/ Voltage Rating	0.3 - 63A/240V AC, 0.3-32A/480Y/277V AC
Calibration Temperature	40°C (104°F)
Ambient Temperature	-25°C to +70°C (-13°F to 158°F)
Storage Temperature	-40°C to +70°C (-40°F to 158°F)
Terminal Size Acceptability	Top: 18-3 AWG; Bottom: 18-2 AWG
Terminal Torque (min/max)	2 Nm (17.7 lb.in.) / 2.5Nm (22.2 lb.in)
Electrical Life	6,000 switching cycles ON/ OFF
Mechanical Life	10,000 switching cycles ON/ OFF
Vibration Resistance	> 15g according to DIN EN 60069-2-59 during a load with $I_1 = 1.05 \times I_N$
Resistance to mechanical shocks	25g @ 11ms
Degree of protection acc. IEC/EN 60529	IP20
Mounting Orientation	In any plane

Short Circuit Interrupting Capacity

Pole	Type	0.3-32A	40-63A
4	AC	10kA @ 240, 480Y/277V	10kA @ 240V