


Don't Limit Yourself ...


We now carry Current Limiting UL 489 Circuit Breakers

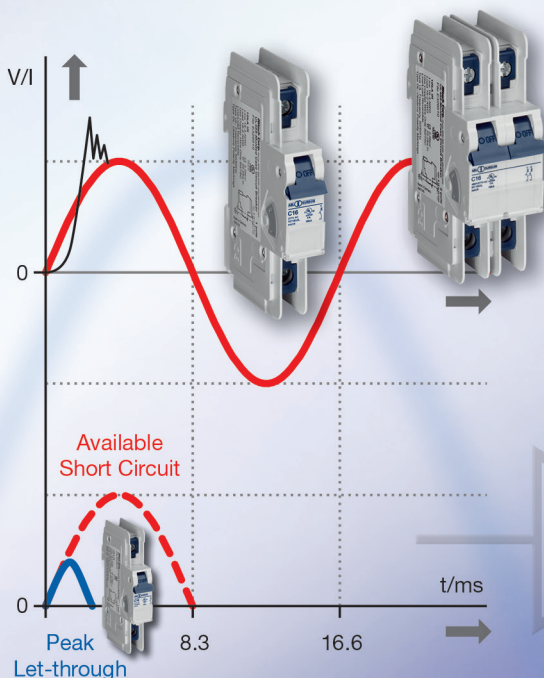

Current limiting circuit breakers minimize the short circuit current to a relatively small amount in an extremely short time. This limits the short circuit potential harmful energy.

OTHER FEATURES


DIN Rail Mounted
17.5mm width
Thermal Magnetic
AC: 240V, 480Y/277V AC, 50/60Hz
DC: 125V DC (1 pole); 250V DC (2pole)
10kA Short Circuit
Interrupting Capacity
HACR Type 40°C
Line/Load reversible

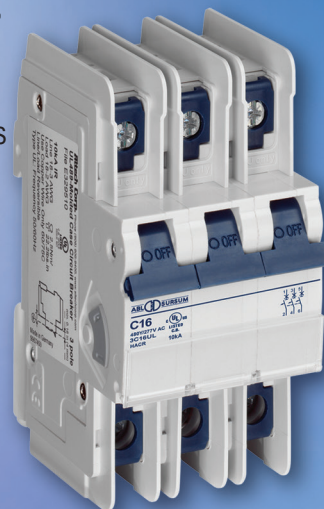

UL US
LISTED
C.B.
E329510




More Advantages...

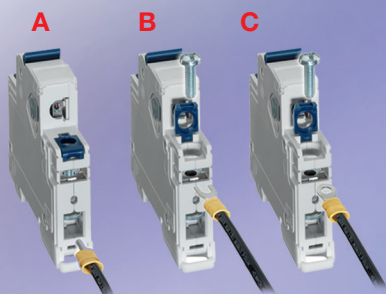

Unique standard dual connection terminals.

- A** Box terminal for solid conductors or flexible conductors.
- B** Screw terminal for forked cable lug.
- C** Screw terminal for ring tongue connection.

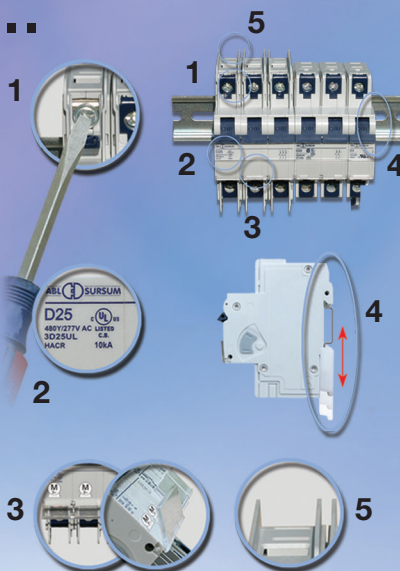

- 1 Hinged terminal cover design allows easy access to terminal screws.
- 2 Individual Part Number is shown on each circuit breaker.
- 3 Designated marking area is protected with clear hinged cover.
- 4 DIN Clip can be released.
- 5 Flexible replaceable terminal barriers.



Altech Corp.®

Contact breakers@altechcorp.com
908.806.9400, ext-419
www.altechcorp.com



**Altech carries the
Most Complete Line of
UL489, UL508 and UL1077 DIN Rail
Miniature Circuit Protection Devices**