

Protect Your Investment with **Altech SUPERIOR** Circuit Protection Devices

2 series, 5 lines, 3 UL approvals, AC and DC models and the **Most** trip curves in the industry.

Altech has the broadest offering in the industry.

SERIES ONE

Current Limiting




UL489

UL(AC), DL(DC) Series

- Available in AC and DC models
- 0.3-63A/ 240V AC, 0.3-32A/ 480Y/277V AC
- 0.3-60A / 125V DC (1 pole); 250V DC (2 pole)
- Thermal Magnetic
- 10kA Short Circuit Interrupting Capacity

Suitable as Motor Disconnect



UL508

V-EA Series Manual Motor Controllers

- 0.3-60A/480Y/277V AC
- 0.3-25A: 1 pole - 42V DC; 2 Pole - 80V DC
- 30-60A: 1 pole - 24V DC; 2 Pole - 60V DC
- Thermal Magnetic
- 10kA Short Circuit Withstand Capacity



UL1077


UR Series Supplementary Protector

- 0.5-60A / 480Y/277V AC
- Thermal Magnetic
- 10kA Short Circuit Withstand Capacity

UNIQUE DUAL CONNECTION TERMINALS

You Tube


VIDEO AVAILABLE

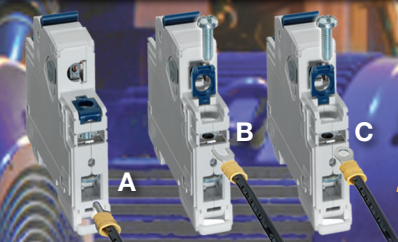

- A Box terminal for solid conductors or flexible conductors.
B Screw terminal for forked cable lug.
C Screw terminal for ring tongue connection.

**Intelligently Designed ...
... the Smart Choice!**

SERIES TWO



UL489

L Series, AC or DC


- Available in AC and DC models
- 0.2-63A/240VAC, 0.2-32A/480Y/277VAC
- 0.2-63A / 125V DC (1 pole); 250V DC (2 pole)
- Thermal Magnetic
- 10kA Short Circuit Interrupting Capacity



UL1077

R Series Supplementary Protector

- 0.5-63A / 480Y/277V AC
- Thermal Magnetic
- 10kA Short Circuit Withstand Capacity



NEW

UL Earth Leakage Current Protection

- **UL 1077** Ground Fault Relay with Overload Protection
- **UL 489** Branch Circuit Breaker with Ground Fault Relay
- **UL 1053** Ground Fault Sensing and Relaying Device