


# 1st & ONLY

UL489 GROUND FAULT RELAY IN THE INDUSTRY

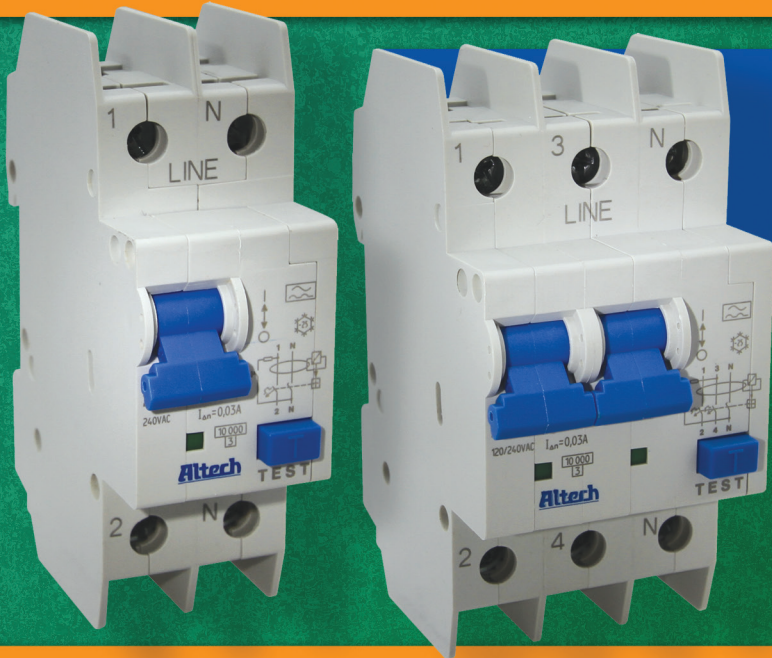

## Branch Circuit Breaker with Ground Fault Relay

- 1 Pole + N, 2 Pole and 2 Pole + N versions
- 240V AC and 120/240V AC
- Rated Current 5 - 40A
- Residual Current Sensitivity 10, 30, 100 and 300mA
- Rated Short Circuit Interrupt Capacity 10kA
- Rated Frequency 50/60Hz
- Overload Trip Curves B, C and D



The Most Complete Lineup of UL Ground Fault Equipment Protection



Ground Fault Sensing & Relaying Equipment E483493

### UL 1053

Ground Fault Sensing and Relaying Device

- 1 Pole + N and 3 Pole + N versions
- 277V AC and 480Y/277V AC
- Rated Current 25, 40 and 63A
- Residual Current Sensitivity 10, 30, 100 and 300mA
- Rated Short Circuit Withstand Capacity 10kA
- Rated Frequency 50/60Hz



Ground Fault Sensing & Relaying Equipment E483493

### UL 1077

Ground Fault Relay with Overload Protection

- 1 Pole + N and 3 Pole + N versions
- 277V AC and 480Y/277V AC
- Rated Current 5 - 40A
- Residual Current Sensitivity 10, 30, 100 and 300mA
- Rated Short Circuit Withstand Capacity 10kA
- Rated Frequency 50/60Hz
- Overload Trip Curves B, C and D



**Altech Corp.**<sup>®</sup>

Contact info@altechcorp.com  
908.806.9400  
www.altechcorp.com

Contact Altech for a catalog today.

The industry leader in UL Circuit Protection.