


Foot-switch

Series F2

Description F2-U2ZPS/U2ZPS UN

Article number 6162720784

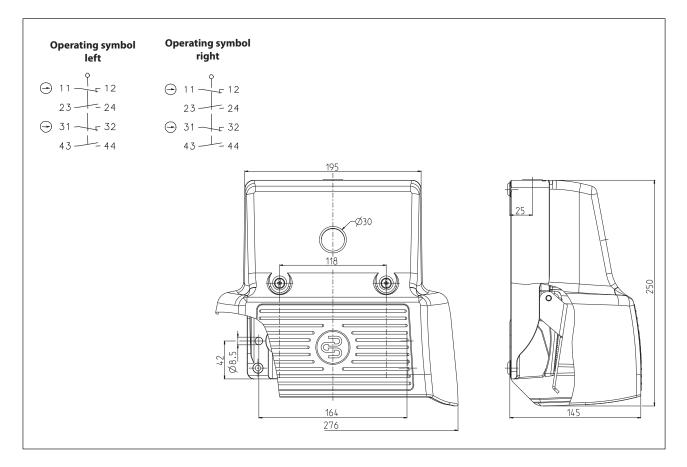

Electrical Data		
Rated insulation voltage	U	400 V AC
Conv. thermal current	l the	10 A
Rated operational voltage	U	240 V
Utilization category		AC-15, U _e /I _e 240 V / 3 A
Direct opening action	\ominus	acc. to IEC/EN 60947-5-1, annex K
Short-circuit protective device		Fuse 2 A gG
Protection class		Ι

BERNSTEIN AG . Hans-Bernstein-Straße 1 . 32457 Porta Westfalica . www.bernstein.eu

Technical Data



Mechanical data		
Enclosure	AL, die-cast	
Protective guard (UN)	AL, die-cast	
Actuator	Foot lever (PA)	
Ambient air temperature	-30 °C +80 °C	
Contact type	4 NC, 4 NO (Zb)	
Operating force	\approx 10 N (pedal centre)	
Mechanical life	10 x 10 ⁶ operating cycles	
Switching frequency	max. 50 / min	
Assembly	2 x M8	
Connection	screw terminals (M3,5)	
Number of connections	16	
Protection ground	2 x M4	
Conductor cross-sections	Solid: 0,5 1,5 mm² or	
	Litz wire with ferrules: 0,5 1,5 mm ²	
Cable entrance	1 x 3/4" NPT	
Weight	≈ 2,63 kg	
Protection type	IP65 acc. to IEC/EN 60529	

ID for safety engineering	
B10d	20 x 10 ⁶ cycles

Standards	
VDE 0660 T100, DIN EN 60947-1, IEC 60947-1	
VDE 0660 T200, DIN EN 60947-5-1, IEC 60947-5-1	
DIN EN ISO 13849-1	

EU	Conformity
	contornity

acc. to directive 2006/42/EC

Approvals

cCSA{us} A300 (same polarity) CCC

Notes

Unused threaded holes and openings for fitted parts are to be permanently closed with blanking plugs or with the appropriate fitted inserts.

The degree of protection specified (IP code) applies only to a properly closed protective guard and the use of an equivalent cable gland with adequate cable, blanking plugs, fitted inserts or sealing plugs.

With pedal cover (st) left and right.

BERNSTEIN AG . Hans-Bernstein-Straße 1 . 32457 Porta Westfalica . www.bernstein.eu

Page 2 of 2