


PCB Terminal Block

7.00 mm Pin Spacing

- Board Mount PCB
- 12A Current Rating
- Height 8.2mm
- Modular / stackable, no dovetail version

**MVS13xx-7,00-H**

Top Wire Entry

**Electrical Ratings**

	B	C	D	-
Usergroup	B	C	D	-
Rated Voltage	300V	-	300V	450V
Rated Current	12A	-	12A	17.5A
Wire Size	<i>solid</i> 30-16 AWG <i>stranded</i> 30-16 AWG	-	30-16 AWG	0.25mm ² - 1.5mm ² 0.25mm ² - 1.5mm ²

**Ordering Information**

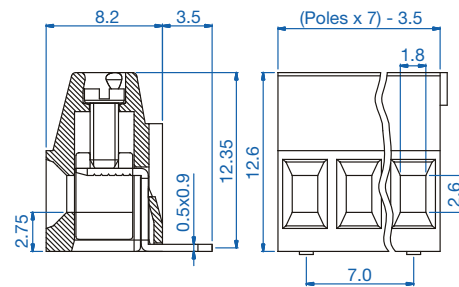
No. Poles	Length (mm)	Std. Pack	Order # - Modular	Order # - No Dovetails
2	10.5	200	MVS132-7,00-H	MVS132-7,00-H-L
3	17.5	200	MVS133-7,00-H	MVS133-7,00-H-L
4	24.5	200	MVS134-7,00-H	MVS134-7,00-H-L
5	31.5	200	MVS135-7,00-H	MVS135-7,00-H-L
6	38.5	200	MVS136-7,00-H	MVS136-7,00-H-L
7	45.5	200	MVS137-7,00-H	MVS137-7,00-H-L
8	52.5	200	MVS138-7,00-H	MVS138-7,00-H-L
9	59.5	200	MVS139-7,00-H	MVS139-7,00-H-L
10	66.5	200	MVS1310-7,00-H	MVS1310-7,00-H-L
11	73.5	200	MVS1311-7,00-H	MVS1311-7,00-H-L
12	80.5	200	MVS1312-7,00-H	MVS1312-7,00-H-L

Material Specifications

Clamp	Nickel-Copper
Solder tab	Tin-Plated Copper
Screw	Galvanized Steel
Insulating Material	Polyamide
Flammability Class	V0 UL94
Operating Temperature	-30°C - +105°C

Installation Data

Screw Size	M2
Torque	0.2Nm (1.8 lb.in.)
Stripping Length	max. 6mm
Clamp Opening	1.8 x 2.6mm
PCB Hole Size	1.3mm

Dimensions (mm)**Drilling Diagram**