


FEED THROUGH STANDOFF FEET EUROSTRIPS Panel Mount

For wire-to-wire connections in HVAC, appliance, equipment, power distribution and other industrial applications with restricted budget and space requirements.

Easy to use feed through terminal strips are a cost-effective alternative to barrier strips or other types of terminal blocks. Simply strip the wire, insert, and tighten the screw. Eurostrips feature tubular screw clamps, with wire protectors, and recessed screws and contacts to prevent shocks and shorts. The stainless steel wire protectors exhibit excellent memory and the wire stop insures the most efficient connection.

Eurostrips described on this and the preceding page are available with standoff feet for increased wiring efficiency. They can be panel mounted or left to free float. Offered in easy to cut 12 pole strips, they can also be ordered precut with the required number of poles.

- Tubular screw clamp
- Panel mount or free float
- Housing material: polyamide 6.6
- Color: opaque white
- Marking plates or factory imprinted

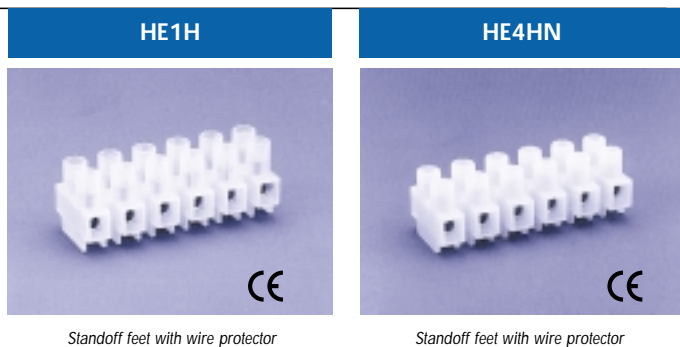


Standoff feet with wire protector

Standoff feet with wire protector


	HE1H		HE4HN	
Pole Spacing	8 mm		10 mm	
Mounting Hole Diameter	3 mm		3.6 mm	
Stripping Length	5 mm		6 mm	
Approvals				
Wire Range	1-2.5 mm ²	24-12 AWG	2.5-4 mm ²	24-10 AWG
Voltage Rating	400 V	600 V	400 V	600 V
Current Rating	6 A	20 A	10 A	30 A
Torque	0.5 Nm	4.4 lb-in	0.8 Nm	7.0 lb-in

No. of Poles	Cat. No.	Std. Pk.	Cat. No.	Std. Pk.
2	HE1HWPR/02	100	HE4HNWPR/02	100
3	HE1HWPR/03	100	HE4HNWPR/03	100
4	HE1HWPR/04	100	HE4HNWPR/04	100
5	HE1HWPR/05	100	HE4HNWPR/05	100
6	HE1HWPR/06	50	HE4HNWPR/06	50
7	HE1HWPR/07	50	HE4HNWPR/07	50
8	HE1HWPR/08	50	HE4HNWPR/08	50
9	HE1HWPR/09	50	HE4HNWPR/09	50
10	HE1HWPR/10	50	HE4HNWPR/10	50
11	HE1HWPR/11	50	HE4HNWPR/11	50
12	HE1HWPR/12	50	HE4HNWPR/12	50



Dimensions mm


A = 8.0	I = 6.6
B = M2.6	J = 6.5
C = 5.2	K = 10.3
D = 2.8	L = 94 (12 pole)
E = Ø3	M = 16
F = Ø5	N = 16.2
G = 8.0	O = 10.1
H = Ø2.8	



Dimensions mm

A = 10.0	I = 6.7
B = M3	J = 8.5
C = 6.4	K = 12.1
D = 3.5	L = 117 (12 pole)
E = Ø3.6	M = 19.1
F = Ø5.7	N = 20
G = 10.0	O = 14.0
H = Ø3.6	

HE6H



Standoff feet with wire protector

12 mm

4.2 mm

7 mm




4-6 mm² 20-10 AWG

400 V 600 V

16 A 40 A

0.8 Nm 7.0 lb-in

HE10H



Standoff feet with wire protector

15 mm

4.3/5.7 mm

8.5 mm




6-10 mm² 18-8 AWG

400 V 600 V

25 A 50 A

1.2 Nm 10.6 lb-in

HE16H



Standoff feet with wire protector

15 mm

4.3/5.7 mm

8.5 mm




10-16 mm² 18-6 AWG

400 V 600 V

35-63 A 63 A


2.0 Nm 17.7 lb-in

Cat. No.	Std. Pk.	Cat. No.	Std. Pk.	Cat. No.	Std. Pk.
HE6HWPR/02	100	HE10HWPR/02	40	HE16HWPR/02	40
HE6HWPR/03	100	HE10HWPR/03	40	HE16HWPR/03	40
HE6HWPR/04	100	HE10HWPR/04	40	HE16HWPR/04	40
HE6HWPR/05	100	HE10HWPR/05	40	HE16HWPR/05	40
HE6HWPR/06	50	HE10HWPR/06	20	HE16HWPR/06	20
HE6HWPR/07	50	HE10HWPR/07	20	HE16HWPR/07	20
HE6HWPR/08	50	HE10HWPR/08	20	HE16HWPR/08	20
HE6HWPR/09	50	HE10HWPR/09	10	HE16HWPR/09	10
HE6HWPR/10	25	HE10HWPR/10	10	HE16HWPR/10	10
HE6HWPR/11	25	HE10HWPR/11	10	HE16HWPR/11	10
HE6HWPR/12	25	HE10HWPR/12	10	HE16HWPR/12	10




Dimensions mm

A = 12.0 I = 9
 B = M3.5 J = 9.6
 C = 7.7 K = 13.9
 D = 4.3 L = 140 (12 pole)
 E = Ø4.2 M = 21.8
 F = Ø6.3 N = 22.6
 G = 12.0 O = 15
 H = Ø4.1



Dimensions mm

A = 15.0 I = 10.7
 B = M4 J = 11.3
 C = 9.3 K = 17.5
 D = 5.7 L = 175 (12 pole)
 E = Ø4.3/5.7 M = 27.8
 F = Ø8.2 N = 25.1
 G = 15.0 O = 16
 H = Ø5.0



Dimensions mm

A = 15.0 I = 10.7
 B = M5 J = 11.3
 C = 9.3 K = 17.5
 D = 5.7 L = 175 (12 pole)
 E = Ø4.3/5.7 M = 27.8
 F = Ø8.2 N = 25.1
 G = 15.0 O = 16
 H = Ø5.6