


PCB Terminal Block


3.81 mm Pin Spacing

- Board Mount PCB
- 12A Current Rating
- Height 8.5mm
- Stackable, no dovetails



MV13xx-3,81-V-L

Front Wire Entry



Electrical Ratings		UL US E178356		IEC	VDE N.40019705
Usergroup	B	C	D		
Rated Voltage	300V	-	300V	130V	
Rated Current	12A	-	12A	13.5A	
Wire Size	<i>solid</i> 30-16 AWG	-	30-16 AWG	0.25mm ² - 1.5mm ²	
	<i>stranded</i> 30-16 AWG	-	30-16 AWG	0.25mm ² - 1.0mm ²	

Ordering Information

No. Poles	Length (mm)	Std. Pack	Order # - Stackable
2	7.62	200	MV132-3,81-V-L
3	11.43	200	MV133-3,81-V-L
4	15.24	200	MV134-3,81-V-L
5	19.05	200	MV135-3,81-V-L
6	22.86	200	MV136-3,81-V-L
7	26.67	100	MV137-3,81-V-L
8	30.48	100	MV138-3,81-V-L
9	34.29	100	MV139-3,81-V-L
10	38.10	100	MV1310-3,81-V-L
11	41.91	100	MV1311-3,81-V-L
12	45.72	100	MV1312-3,81-V-L
13	49.53	100	MV1313-3,81-V-L
14	53.34	100	MV1314-3,81-V-L
15	57.15	100	MV1315-3,81-V-L
16	60.96	100	MV1316-3,81-V-L
17	64.77	100	MV1317-3,81-V-L
18	68.58	100	MV1318-3,81-V-L
19	72.39	100	MV1319-3,81-V-L
20	76.20	100	MV1320-3,81-V-L
21	80.01	100	MV1321-3,81-V-L
22	83.82	100	MV1322-3,81-V-L
23	87.63	100	MV1323-3,81-V-L
24	91.44	100	MV1324-3,81-V-L


Material Specifications

Clamp	Nickel Copper
Solder tab	Tin-Plated Copper
Screw	Galvanized Steel
Insulating Material	Polyamide
Flammability Class	V0 UL94
Operating Temperature	-30°C - +105°C

Installation Data

Screw Size	M2
Torque	0.2Nm (1.8 lb.in.)
Stripping Length	max. 6mm
Clamp Opening	1.8 x 1.8mm
PCB Hole Size	1.3mm

Dimensions (mm)

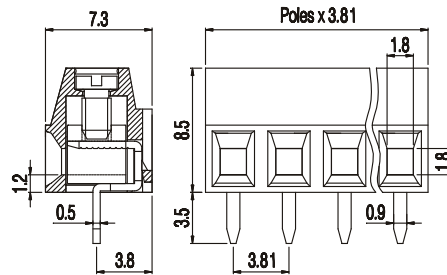

Drilling Diagram

