

CIMRE1SS2/2 4A/OM



Relay Module 1CO 2 Channel 24VAC (SPDT)

Fully-enclosed IP20 rated design

Custom configurations up to 32 channels

Long Tail Jumpers.

Ergonomic for wiring ease

High quality standards and approvals

Long-life laser marking

Additional all-axis marking provision

Over voltage category: III

Pollution degree :2

Option to select Pluggable/Soldered Relays

Standard and reverse type marking option available.

Low Coil Drive Current (4.7 mA to 100 mA).

LED indication to denote relay actuation.

Freewheeling diode across relay coil.

TECHNICAL DATA

Bussing Possibility	By using spare jumpers.*****
Supply Voltage Indication	3mm Red LED
Relay Protection Method	Using 1N4007 Free Wheeling Diode
Ambient Operating Temperature	-20 to 50 °C
Mounting Possibility	DIN 35/DIN 35-15 Rail
Housing Material	PC
Housing Colour	Grey
Rated Input voltage	24 VAC
Rated Voltage	24 VAC
Rated output Current/channel	10 A

RELAY INPUT / COIL SPECIFICATIONS

Nominal Operating Voltage	24 VAC
Nominal Input Current	46.5 mA
Maximum Operating Voltage	26.4 VAC
Must Operate Voltage	19.2 VAC
Must Release Voltage	7.2 VAC
Nominal Input Power	0.9 VA
Coil Resistance	260 Ω

RELAY OUTPUT/CONTACT SPECIFICATIONS

Contact Type	SPDT - 1CO
Contact Material	Ag-alloy (Cd free)
Contact Resistance	30 mΩ max.
Rated Contact Current (Resistive Load)	10 A

RELAY OUTPUT/CONTACT SPECIFICATIONS

Load Voltage Range	250VAC/30VDC
Maximum Switching Voltage	440 VAC
Maximum Operating Frequency	18,000 Opr./Hr (Mechanically)
Turn-Off Time	5ms (Without Diode)
Turn-On Time (0 Cross Turn On)	15ms (Without Diode)

CONNECTION SPECIFICATIONS

Type of Connection	Screw Connection
Min. Wire Size	0.5 mm ²
Max. Wire Size	2.5 mm ²
Min. Wire Size(AWG)	20 AWG
Max. Wire Size(AWG)	12 AWG
Screw Size	M2.5
Wire Stripping Length	8 mm
Torque	0.4 Nm
Torque	3.5 lb-in


ORDERING INFORMATION

CAT. NO.	DESCRIPTION	NO. OF CHN.	DIM. DET.	STD. PACK
CIMRE1SS2 /24A/OM	1CO 2CH 24VAC CW Relay Module With Base (Pluggable Relay) Rail Mount	2	59.1 x 77 x 54	1
CIMRE1S2/ 24A/OM	1CO 2CH 24VAC CW Relay Module With Soldered Relay Rail Mount	2	59.1 x 77 x 50	1

CIMRE1SS2/2
4A/OM



CIRCUIT DIAGRAM

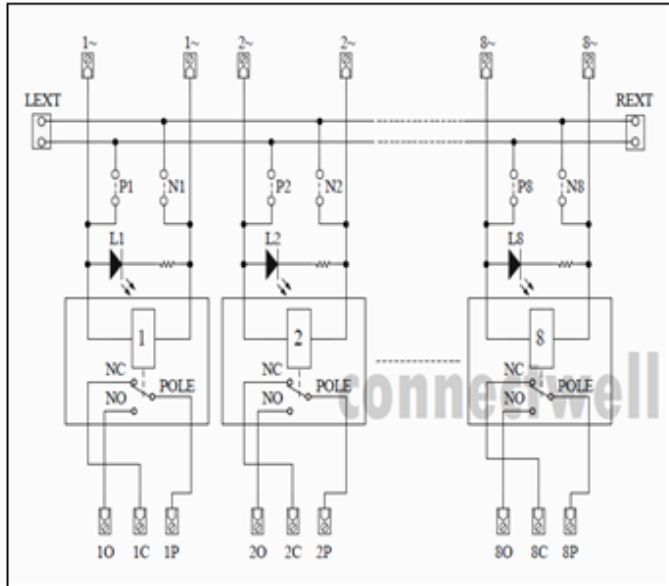

NOTES

***Module with Other Coil Voltage like 6 VDC, 48 VDC, 24 VAC, etc. are available on request. All values in the are the initial values at 23°C.

**** Module is Factory-built common negative, To change to common positive move the Jumpers to PC.

***** To use as a standard module without bussing put the jumpers into spare parking space available on Module.

All values in the are the initial values at 23°C.